

A New Variational Approach Based on Proximal Deep Injection and Gradient Intensity Similarity for Spatio-Spectral Image Fusion

Zhong-Cheng Wu¹, Ting-Zhu Huang¹, Liang-Jian Deng¹, *Member, IEEE*,
Gemine Vivone², *Senior Member, IEEE*, Jia-Qing Miao¹, *Member, IEEE*, Jin-Fan Hu¹, and Xi-Le Zhao¹

Abstract—Pansharpening is a very debated spatio-spectral fusion problem. It refers to the fusion of a high spatial resolution panchromatic image with a lower spatial but higher spectral resolution multispectral image in order to obtain an image with high resolution in both the domains. In this article, we propose a novel variational optimization-based (VO) approach to address this issue incorporating the outcome of a deep convolutional neural network (DCNN). This solution can take advantages of both the paradigms. On one hand, higher performance can be expected introducing machine learning (ML) methods based on the training by examples philosophy into VO approaches. On other hand, the combination of VO techniques with DCNNs can aid the generalization ability of these latter. In particular, we formulate a ℓ_2 -based proximal deep injection term to evaluate the distance between the DCNN outcome, and the desired high spatial resolution multispectral image. This represents the regularization term for our VO model. Furthermore, a new data fitting term measuring the spatial fidelity is proposed. Finally, the proposed convex VO problem is efficiently solved by exploiting the framework of the alternating direction method of multipliers (ADMM), thus guaranteeing the convergence of the algorithm. Extensive experiments both on simulated, and real datasets demonstrate that the proposed approach can outperform state-of-the-art spatio-spectral fusion methods, even showing a significant generalization ability. Please find the project page at https://liangjiandeng.github.io/Projects_Res/DMPIF_2020jstars.html.

Index Terms—Deep convolutional neural networks (DCNN), dynamic gradient sparsity, gradient intensity similarity, image fusion, pansharpening, remote sensing, variational approaches.

Manuscript received August 27, 2020; revised September 29, 2020; accepted October 5, 2020. Date of publication October 12, 2020; date of current version October 26, 2020. The work was supported in part by the National Natural Science Foundation of China under Grants 61772003, 61702083, and 61876203, and in part by the Key Projects of Applied Basic Research in Sichuan Province under Grant 2020YJ0216. (Corresponding authors: Ting-Zhu Huang; Liang-Jian Deng.)

Zhong-Cheng Wu, Ting-Zhu Huang, Liang-Jian Deng, Jin-Fan Hu, and Xi-Le Zhao are with the School of Mathematical Sciences, University of Electronic Science and Technology of China, Chengdu 611731, China (e-mail: wuzhch97@163.com; tingzhuang@126.com; liangjian.deng@uestc.edu.cn; 903540917@qq.com; xlzhao122003@163.com).

Gemine Vivone is with the National Research Council - Institute of Methodologies for Environmental Analysis, CNR-IMAA, 85050 Tito Scalo, Italy (e-mail: gemine.vivone@imaa.cnr.it).

Jia-Qing Miao is with the School of Computer Science, and Technology, University of Southwest Minzu of China, Chengdu 610041, China (e-mail: mj_q_011114117@163.com).

Digital Object Identifier 10.1109/JSTARS.2020.3030129

I. INTRODUCTION

MULTISPECTRAL (MS) remote sensing images have become widely exploited in many fields, such as environmental monitoring, agriculture, and classification. However, due to constraints on the signal-to-noise ratio, many existing remote sensing sensors, e.g., IKONOS, Pléiades, WorldView-2, and WorldView-3, have to make a fundamental tradeoff between the spatial and spectral resolutions [3]–[8]. Generally, they almost simultaneously capture two images of the same scene in pursuit of richer information, including a panchromatic (PAN) image with a higher spatial resolution but a unique spectral channel and an MS image with a lower spatial resolution but a better spectral content. The PAN/MS fusion (the so-called pansharpening) is committed to integrating the spatial details contained in the PAN image and the spectral information contained in the low spatial resolution MS (LRMS) image to reconstruct a high spatial resolution MS (HRMS) image. For the convenience of understanding intuitively, the schematic of the PAN/MS fusion, as well as several fused images, are presented in Fig. 1.

Spatio-spectral image fusion has aroused widespread interest in academia and numerous methods have been proposed so far [9]–[15]. Most of them can be generally classified into four major categories [16], [17]: 1) Component substitution (CS) methods; 2) Multiresolution analysis (MRA) methods; 3) Variational optimization (VO) approaches; and 4) ML techniques.

The CS methods are the earliest and the most widely used methods due to their extremely low computational cost [17]. The principle of such an approach is the substitution of the spatial component, which is derived by spectrally transforming the LRMS image, with the PAN image. Among them, the intensity-hue-saturation [18], the principal component analysis [19], the Brovey transform [20], the Gram–Schmidt (GS) spectral sharpening [21] and the partial replacement adaptive component substitution [22] are very representative. These methods project first the upsampled LRMS images (LMS) into a new transformation domain, then replace the projected spatial component with the PAN image and, finally, perform an inverse projection to get the HRMS image. Compared to other approaches, the CS methods have a reduced computational burden. However, they usually cause severe spectral distortion [23].

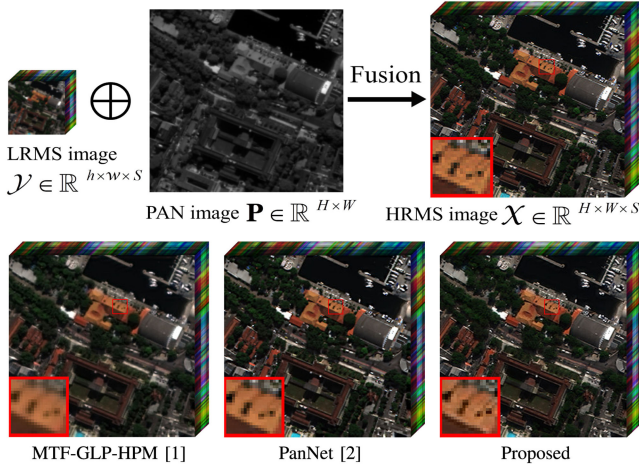


Fig. 1. Top row: the schematic of the PAN/MS fusion on a simulated Rio data (source: WorldView-3). Bottom row: fused images by the MTF-GLP-HPM [1], the PanNet [2] and the proposed method, respectively. The red, green, and blue channels of the shown images are extracted from the fifth, the third, and the second bands, respectively. Note that, the HRMS image $\mathcal{X}$ displayed in the top row is the GT image.

In addition to CS methods, MRA approaches are other popular fusion techniques, which inject the spatial structure information extracted from the PAN image via spatial filtering into the LMS image in order to get the HRMS image. Powerful instances belonging to this class are the smoothing filter-based intensity modulation [24], the modulation transfer function (MTF) generalized laplacian pyramid with full resolution regression-based injection model (GLP-Reg-FS) [25], and the MTF generalized Laplacian Pyramid with high-pass modulation injection model (MTF-GLP-HPM) [1]. The fused images provided by MRA approaches mainly suffer from spatial distortion, whereas spectral information is usually well-preserved. In general, MRA and CS methods can obtain relatively satisfactory fusion results. Yet, despite the advantages, neither of them establish an explicitly relational model between the observed and the desired image, which could reduce performance on certain data [17].

Different from the CS and MRA methods, the VO methods describe an exact link among the LRMS image, the PAN image, and the ideal HRMS image based on some observations and assumptions, thus formulating an energy function. Then, the desired HRMS image can be obtained by regularizing this energy function and solving an optimization problem. For instance, in [4], Fu *et al.* consider the gradient difference of the PAN image and the HRMS image in different local patches and bands rather than global constraints incorporating the spatial preservation into the proposed variational model. Generally speaking, VO methods can theoretically produce excellent results, both spatially and spectrally, with a solid mathematical foundation [17]. Unfortunately, they usually generate many unpredictable deviations once some unreasonable assumptions are made. Besides, the misalignment among spectral bands is also a tricky issue, which can cause ghosting effects. Although some algorithms with a high registration capability have been proposed, e.g., [26], the fused image is usually formed by low quality high frequency structures.

The ML methods have been proposed in recent years. In particular, deep convolutional neural networks (DCNNs) show an excellent capability for nonlinear mapping learning and feature extraction [17], [27], see, e.g., [2], [28]–[31]. These methods can perfectly compensate the deficiencies of the VO methods about nonlinear mapping and managing misalignments getting state-of-the-art performance [32]. For these methods, training the network to map information is a necessary step before the fusion step. Afterward, the fused image can be obtained by inputting the LRMS image and PAN image into the learned network. However, they are often over-dependent on the training data [4], so that the generalization of many DCNN methods is limited by their training data, i.e., they have excellent performance only on data similar to the ones in the training set. In particular, because of the network parameters are fixed once the training is finished, the accuracy of DCNN-based methods cannot be further improved [4].

In this article, we propose a novel VO approach for fusing MS and PAN images using the proximal deep injection (PDI), i.e., formulating the output of a DCNN as the proximal term and integrating it into the proposed variational model for further optimization. Specifically, the proposed model consists of two data fitting terms (the spectral and the spatial ones) and a DCNN-based proximal term, namely the PDI. The spectral fidelity is imposed on the LRMS image and enables the desired image to adequately receive spectral information. The spatial counterpart is imposed by exploiting a $\ell_{2,1}$ norm encouraging dynamic gradient sparsity and group sparsity simultaneously, i.e., the group dynamic gradient sparsity (GDGS) [26], between the desired image and a reference PAN (RePAN) image. Unlike the original work [26] that uses as RePAN, a simple replication of the PAN image along the spectral dimension, the proposed RePAN is relied upon both the LRMS and the PAN image in order to take into account of the spectral content of the spatial details. This leads to the proposed gradient intensity similarity constraints (GISC). Finally, we exploit the prior knowledge provided by a DCNN into the proposed variational model through the PDI that represents a regularization term in our framework. This new variational optimization problem is solved by designing an ADMM-based algorithm, which is guaranteed to efficiently converge to the global minimum. Extensive experiments both on simulated and real datasets confirm the superiority of the proposed VO approach compared to other state-of-the-art methods. The flowchart of the proposed model is provided in Fig. 2.

The *contributions* of this article are summed up as follows.

- 1) The concept of PDI is proposed merging the outcome of a DCNN-based method with a VO approach. PDI represents a regularization term that can leverage on the output of any DCNN to improve the results in the proposed VO framework. Thus, this combination is able to complement the benefits of the DCNNs improving their generalization ability for the spatio-spectral fusion problem.
- 2) A new spatial fidelity term is proposed exploiting a $\ell_{2,1}$ norm encouraging simultaneously dynamic gradient sparsity and group sparsity between the desired image and the properly designed RePAN image.

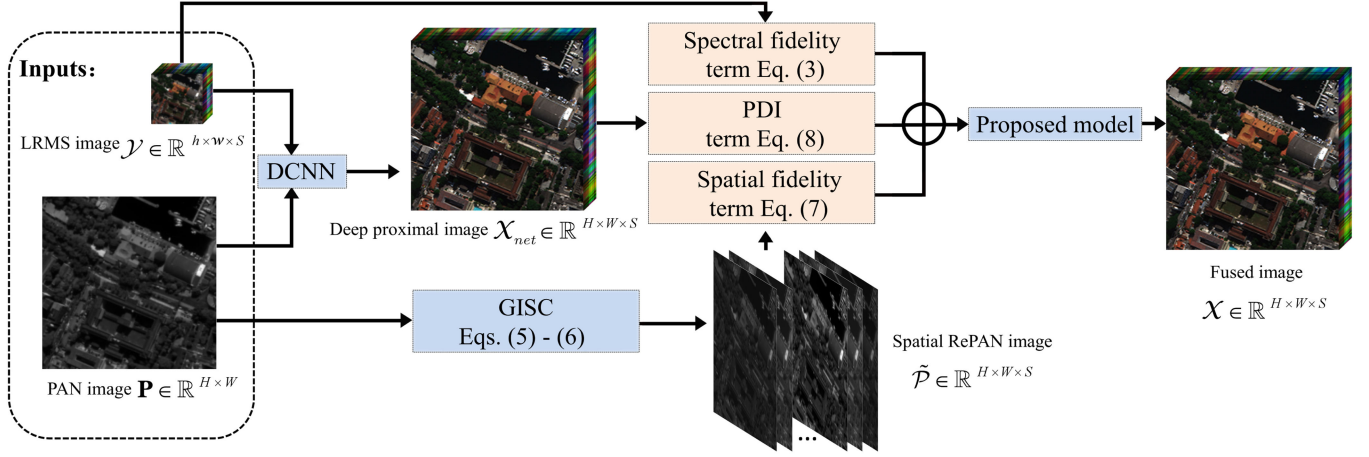


Fig. 2. Flowchart of our model. The GISC denotes the operation as in (5) and (6), see Section III-B. The acronym DCNN stands for deep convolutional neural network.

- 3) A new algorithm based on ADMM is presented to solve the proposed optimization problem based on a classical spectral fidelity term and the proposed spatial fidelity and regularization terms.
- 4) A broad experimental analysis both on simulated and real datasets is conducted to assess the performance of the proposed VO approach in different scenarios and with different acquisition devices. Furthermore, a deep robustness analysis about some crucial parameters has also been provided to the readers together with an ablation study and an assessment of the generalization abilities of the proposed approach.

The remaining of this article is organized as follows. In Section II, the main notation and motivations will be briefly introduced. The proposed VO model is described in Section III. Afterward, the solution of the proposed VO problem is provided in Section IV. In Section V, the experimental analysis is shown comparing the proposed method with some state-of-the-art approaches. Finally, Section VI concludes this article.

II. NOTATION AND MOTIVATIONS

This section is devoted to the presentation of the notation and the motivations under the developing of the proposed method.

A. Notation

Before introducing the proposed model, it is necessary to state the notation used in this article. In particular, scalars are denoted by lowercase letters, uppercase and lowercase bold letters denote matrices and vectors, respectively, and calligraphic letters denote tensor. Moreover, the main symbols and acronyms used in this article are listed as follows:

- 1) HRMS: the desired HRMS image $\mathcal{X} \in \mathbb{R}^{H \times W \times S}$ with spectral images $\mathbf{X}_i \in \mathbb{R}^{H \times W}$, $i = 1, 2, \dots, S$.
- 2) LRMS: the observed LRMS image $\mathcal{Y} \in \mathbb{R}^{h \times w \times S}$ with spectral images $\mathbf{Y}_i \in \mathbb{R}^{h \times w}$, $i = 1, 2, \dots, S$. In particular,

$h \times r = H$ and $w \times r = W$, where r denotes the scale factor between $\mathbf{X}_i$ and $\mathbf{Y}_i$,

- 3) PAN image: the observed single channel PAN image $\mathbf{P} \in \mathbb{R}^{H \times W}$.
- 4) RePAN image: the PAN image $\tilde{\mathbf{P}} \in \mathbb{R}^{H \times W \times S}$ used as reference for the spatial fidelity term in the proposed model.

B. Motivations

DCNN methods have recently been attracted attention for their ability in nonlinear mapping yielding competitive results even for image fusion. However, they have also been shown some drawbacks, as analyzed in Section I, because of the huge data dependence and the use of network parameters that can be hardly adjusted on data very different from the ones shown in the training phase. Therefore, an optimization strategy needs to be developed to compensate for these shortcomings and to further improve the performance. For this reason, we propose the concept of PDI, aiming to introduce the output of a DCNN-based method into a VO framework. The PDI term establishes a relationship between this output and the desired HRMS image, thus transferring DCNNs into a variational fusion framework.

Furthermore, there is a need to complete the variational model including the data fitting terms relating the spectral and the spatial data in input with the desired and unknown HRMS data. In that model, the PDI plays the role of a regularization term avoiding the use of other additional prior information often used in the related literature, see, e.g., sparse priors [33] and low-rank priors [34]. Having a look at most of the existing VO methods, the design of the spectral fidelity term is almost the same for all the techniques. Instead, a crucial choice regards the selection of the spatial fidelity data fitting term accounting for the spatial content into the PAN image. The difficulty is to model the indirect and nonlinear relationship between the PAN data and the unknown HRMS image. Hence, an accurate design of the spatial fidelity term for VO models can significantly improve the fusion outcomes, as shown in this article.

III. PROPOSED MODEL

In this section, the adopted model is presented. The general framework for spatio-spectral fusion is as follows:

$$\min_{\mathcal{X}} f_{\text{spec}}(\mathcal{X}, \mathcal{Y}) + \lambda f_{\text{spat}}(\mathcal{X}, \mathbf{P}) + \alpha f_{\text{PDI}}(\mathcal{X}, \mathcal{X}_{\text{net}}) \quad (1)$$

where $f_{\text{spec}}(\mathcal{X}, \mathcal{Y})$ and $f_{\text{spat}}(\mathcal{X}, \mathbf{P})$ are the spectral and spatial fidelity terms, respectively, $f_{\text{PDI}}(\mathcal{X}, \mathcal{X}_{\text{net}})$, i.e., the PDI term, plays the role of a regularization term, $\mathcal{X}_{\text{net}} \in \mathbb{R}^{H \times W \times S}$ represents the output of a generic DCNN method, λ is a positive regularization parameter, and α is a crucial parameter that links the VO model and the output of a DCNN. For the convenience of discussion, (1) can be rewritten in matrix form as

$$\min_{\mathbf{X}} f_{\text{spec}}(\mathbf{X}, \mathbf{Y}) + \lambda f_{\text{spat}}(\mathbf{X}, \mathbf{P}) + \alpha f_{\text{PDI}}(\mathbf{X}, \mathbf{X}_{\text{net}}) \quad (2)$$

where $\mathbf{X}, \mathbf{X}_{\text{net}} \in \mathbb{R}^{S \times HW}$ and $\mathbf{Y} \in \mathbb{R}^{S \times hw}$ denote the mode-3 unfolding of $\mathcal{X}, \mathcal{X}_{\text{net}}$, and $\mathcal{Y}$, respectively. Please refer to [35] for more details about decompositions and applications of tensors.

A. Spectral Fidelity Term

Many existing fusion methods, e.g., [20], [22], [36], upsample the LRMS image and extract spectral information from this upsampled image. However, inaccurate information could be introduced using this simple approach, thus impacting on the performance. Therefore, we consider in this article the down-sampled version of the unknown HRMS image. This operation is performed according to the point spread function of the spaceborne sensor [37], [38] in order to design the blurring operation. Thus, we have that

$$f_{\text{spec}}(\mathbf{X}, \mathbf{Y}) = \|\mathbf{XBS} - \mathbf{Y}\|_F^2 \quad (3)$$

where $\mathbf{B} \in \mathbb{R}^{HW \times HW}$ is the convolution matrix that blurs each row of $\mathbf{X}$, $\mathbf{S} \in \mathbb{R}^{HW \times hw}$ denotes the decimation matrix and $\|\cdot\|_F$ is the Frobenius norm. In particular, $\mathbf{B}$ is a block-circulant-circulant-block matrix, where the periodic boundary conditions for the rows of $\mathbf{X}$ are satisfied. This property for $\mathbf{B}$ is at the basis of many fast deblurring algorithms [39]–[41]. In this article, we do not estimate the kernel $\mathbf{B}$, even in the case of real data. A classical assumption is to have filters matched with the MS sensor's MTF to extract spatial details, which is also the way used in the work. Usually, these filters are set exploiting some prior information, as the gains at Nyquist frequency. Obviously, for some reasons (e.g., aging) these values could be slightly wrong and for these reasons some recent research has been focused on this issue, see e.g., [42], [43]. Anyway, the estimation of the convolutional blur $\mathbf{B}$ is out-of-scope of this article, but it can surely deserve future developments to slightly improve the performance in particular at full resolution. More details about the matrices $\mathbf{B}$ and $\mathbf{S}$ can be found in [37], [38], [41], [44], [45].

The spectral fidelity term establishes a direct relationship between $\mathbf{X}$ and $\mathbf{Y}$. Thus, we can map the whole spectral information of $\mathbf{Y}$ in $\mathbf{X}$. Despite this, spatial structures are still missing for the ill-conditioning of $\mathbf{S}$. Thus, this term alone is far from being able to reconstruct the missing spatial information.

B. Proposed Spatial Fidelity Term

It is well-known that the distribution of materials is locally continuous, which tends to generate piecewise smooth data. Therefore, the gradient of the desired HRMS image should be sparse and the nonzero elements correspond to the positions of the boundaries of the spatial structures. Besides, since the PAN image and the LRMS image are captured over the same scene, the boundary locations of the desired HRMS image should be theoretically unified with the ones of the PAN image and the same properties should be present across all the bands of the HRMS image. Thus, this connection can be established on the gradient domain. Chen *et al.* [26] assign the pixels with the same spatial position across all the channels of $\mathcal{X}$ into one group and constrain their sparsity using $\ell_{2,1}$ norm defined as follows:

$$\begin{aligned} \|\nabla \mathcal{X} - \nabla \mathcal{P}\|_{2,1} &= \\ &= \sum_i \sum_j \sqrt{\sum_k \sum_q (\nabla_q \mathcal{X}_{i,j,k} - \nabla_q \mathcal{P}_{i,j,k})^2} \end{aligned} \quad (4)$$

where ∇_q , $q = 1, 2$, denote the forward finite difference operators on the first and second coordinates, respectively, and $\mathcal{P}$ indicates the expansion of $\mathbf{P}$ by duplicating it along the S bands. The $\ell_{2,1}$ norm constrains the sparsity of each band of $\mathcal{X}$ enforcing the same position of the structures as in the PAN image. Furthermore, the grouping improves the spectral correlation of the structures.

However, some shortcomings still exist when $\mathcal{P}$ is used. In view of this, we propose a novel concept of GISC. In particular, it is worth to be pointed out that the spectral response of any material to various wavelengths is different. Hence, the gradient intensities of the desired HRMS image are not usually constant along the spectral bands, thus presenting a spectral content. However, simply replicating the PAN image over the bands does not help to support the last statement. Indeed, having a look at (4), we can note that both the position and the gradient intensity of $\mathcal{X}$ are forced to the $\mathcal{P}$ ones, thus impacting on the spatial optimization. Therefore, a pivotal improvement making the gradient intensity structures of $\mathcal{P}$ as similar as possible to the desired ones (i.e., the ones of the target HRMS image) is advisable.

The variation of the gradient intensity means along the spectral bands is analyzed in Fig. 3. In particular, this figure shows the mean intensity both on the original spatial and the gradient domains on the simulated Rio dataset captured by the WorldView-3 sensor. The analysis is conducted both on the reference (high spatial resolution) MS image, see Fig. 3(a), and the LRMS image, see Fig. 3(b). From Fig. 3(a), it is clear to see that there is a positive correlation between the spatial and the gradient domain curves. Therefore, we can reasonably conclude that the desired gradient intensity structures can be reconstructed along the spectral bands by exploiting the means of the spectral bands in the spatial domain. Unfortunately, the reference [ground-truth (GT)] HRMS image is unavailable (because it is the goal of the fusion process). Thus, in Fig. 3(b), the same analysis as in Fig. 3(a) is performed on the available LRMS image. The same trend as in Fig. 3(a) can be pointed out, thus suggesting the

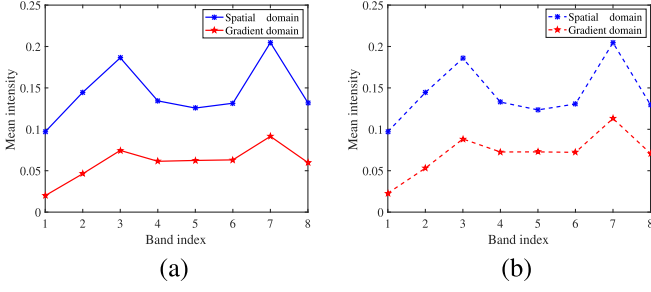


Fig. 3. Mean intensity on the spatial and the gradient domains for (a) the GT (reference) image and (b) the corresponding LRMS image on the simulated Rio WorldView-3 dataset.

use of the means along the spectral bands of the LRMS image $\mathcal{Y}$ to drive the reconstruction of the desired gradient intensity structures. As a result, we can adjust the spatial intensity mean of the i th band of $\mathcal{P}$ (say it $\mathbf{P}_i$) to be equal to that of $\mathbf{Y}_i$, thus capturing the desired gradient intensity structures. The improved RePAN image $\tilde{\mathcal{P}}$ can be obtained as

$$\tilde{\mathcal{P}} = \psi(\mathcal{Y}, \mathcal{P}) \quad (5)$$

where ψ represents a linear definition operator defined as follows:

$$\tilde{\mathbf{P}}_i := \frac{\mathcal{M}(\mathbf{Y}_i)}{\mathcal{M}(\mathbf{P}_i)} \mathbf{P}_i, \quad i = 1, 2, \dots, S. \quad (6)$$

where $\tilde{\mathbf{P}}_i$ denotes the i th band of the $\tilde{\mathcal{P}}$ and $\mathcal{M} \cdot$ represents the mean operator.

Based on the analysis above, the GDGS term with GISC can be employed to enhance the spatial resolution of $\mathbf{X}$. Combining (5) and (6) with (4), the spatial fidelity term in matrix form can be written as follows:

$$f_{\text{spat}}(\mathbf{X}, \tilde{\mathbf{P}}) = \left\| \nabla \mathbf{X} - \nabla \tilde{\mathbf{P}} \right\|_{2,1} \quad (7)$$

where $\tilde{\mathbf{P}} \in \mathbb{R}^{S \times HW}$ is the mode-3 unfolding of $\tilde{\mathcal{P}}$.

The major difference between (7) and (4) proposed in [26] is the used RePAN image. In particular, the proposed RePAN image can transfer many more similar gradient intensity structures than the solution proposed in [26], thus achieving higher performance. The effects of the new proposed spatial fidelity term are assessed in Section V.

C. PDI Term

As stated in Section II-B, we introduce the output of a DCNN-based method into the proposed VO model through the PDI term. Hence, we have that

$$f_{\text{PDI}}(\mathbf{X}, \mathbf{X}_{\text{net}}) = \left\| \mathbf{X} - \mathbf{X}_{\text{net}} \right\|_F^2. \quad (8)$$

Therefore, the final optimization model can be formulated as

$$\min_{\mathbf{X}} \left\| \mathbf{XBS} - \mathbf{Y} \right\|_F^2 + \lambda \left\| \nabla \mathbf{X} - \nabla \tilde{\mathbf{P}} \right\|_{2,1} + \alpha \left\| \mathbf{X} - \mathbf{X}_{\text{net}} \right\|_F^2. \quad (9)$$

The proposed model explores the available spatial and spectral information using the two data fitting terms. Furthermore, with

the PDI term viewed as a regularization, the prior information acquired by any DCNN, see Section V for details, through the training phase, is incorporated into the VO approach improving the performance.

The objective function (9) is convex but nonsmooth, which fails to generate the derivative with respect to $\mathbf{X}$ as directly as in [37] and [44]. Therefore, we propose in the next section a new ADMM-based algorithm to solve it in an efficient way.

IV. PROPOSED ALGORITHM

The proposed model can be solved by exploiting the ADMM framework [46]–[49], which separates the Frobenius norm and $\ell_{2,1}$ norm into two independent subproblems that have closed-form and iterative solutions, respectively. In our model, we can rewrite (9) as an equivalent constrained problem through introducing the auxiliary variable $\mathbf{W} = \mathbf{X} - \tilde{\mathbf{P}}$, namely, we have that

$$\begin{aligned} \min_{\mathbf{X}, \mathbf{W}} \quad & \left\| \mathbf{XBS} - \mathbf{Y} \right\|_F^2 + \lambda \left\| \nabla \mathbf{W} \right\|_{2,1} + \alpha \left\| \mathbf{X} - \mathbf{X}_{\text{net}} \right\|_F^2 \\ \text{s.t.} \quad & \mathbf{W} = \mathbf{X} - \tilde{\mathbf{P}}. \end{aligned} \quad (10)$$

The augmented Lagrangian function of the constrained model (10) can be expressed as

$$\begin{aligned} \mathcal{L}_{\eta}(\mathbf{X}, \mathbf{W}, \Theta) = & \left\| \mathbf{XBS} - \mathbf{Y} \right\|_F^2 + \lambda \left\| \nabla \mathbf{W} \right\|_{2,1} \\ & + \alpha \left\| \mathbf{X} - \mathbf{X}_{\text{net}} \right\|_F^2 + \frac{\eta}{2} \left\| \mathbf{X} - \tilde{\mathbf{P}} - \mathbf{W} + \frac{\Theta}{\eta} \right\|_F^2 + \text{const}, \end{aligned} \quad (11)$$

where Θ denotes the Lagrange multiplier, $\eta > 0$ is a penalty parameter, and *const* represents a generic constant. Afterward, the minimization problem (11) can be solved iteratively and alternatively via updating the following three simpler subproblems:

- 1) The $\mathbf{X}$ -subproblem can be accurately updated by solving the following function:

$$\begin{aligned} \mathbf{X}^{k+1} = \arg \min_{\mathbf{X}} \quad & \left\| \mathbf{XBS} - \mathbf{Y} \right\|_F^2 + \alpha \left\| \mathbf{X} - \mathbf{X}_{\text{net}} \right\|_F^2 \\ & + \frac{\eta}{2} \left\| \mathbf{X} - \tilde{\mathbf{P}} - \mathbf{W}^k + \frac{\Theta^k}{\eta} \right\|_F^2 \end{aligned} \quad (12)$$

which is a least squares problem and has the following closed-form solution:

$$\mathbf{X}^{k+1} = \mathbf{Z}^k \mathbf{H}^{-1} \quad (13)$$

where

$$\mathbf{Z}^k = \eta \tilde{\mathbf{P}} + \eta \mathbf{W}^k - \Theta^k + 2\mathbf{Y}(\mathbf{BS})^T + 2\alpha \mathbf{X}_{\text{net}} \quad (14)$$

$$\mathbf{H} = 2\mathbf{BS}(\mathbf{BS})^T + (2\alpha + \eta)\mathbf{I}. \quad (15)$$

and $\cdot^T$ is the transpose operator.

It is worth to be remarked that the matrix $\mathbf{BS}(\mathbf{BS})^T$ is semipositive, and the identity matrix $\mathbf{I}$ is positive, hence, the matrix $\mathbf{H}$ is invertible.

- 2) The $\mathbf{W}$ -subproblem can be updated by minimizing the following problem:

$$\mathbf{W}^{k+1} = \arg \min_{\mathbf{W}} \frac{\eta}{2} \left\| \mathbf{X}^{k+1} - \tilde{\mathbf{P}} - \mathbf{W} + \frac{\boldsymbol{\Theta}^k}{\eta} \right\|_F^2 + \lambda \|\nabla \mathbf{W}\|_{2,1}. \quad (16)$$

Defining the following intermediate variable:

$$\mathbf{T}^k = \mathbf{X}^{k+1} - \tilde{\mathbf{P}} + \frac{\boldsymbol{\Theta}^k}{\eta} \quad (17)$$

the problem (16) can be rewritten as

$$\mathbf{W}^{k+1} = \arg \min_{\mathbf{W}} \frac{\eta}{2} \left\| \mathbf{W} - \mathbf{T}^k \right\|_F^2 + \lambda \|\nabla \mathbf{W}\|_{2,1}. \quad (18)$$

The $\mathbf{W}$ -subproblem (18) is well-known as the vectorial total variation (VTV) denoising problem [50], [51]. Different from the $\mathbf{X}$ -subproblem, it has no closed-form solution. For the purpose of solving this subproblem more conveniently, the $\mathbf{W}$, $\mathbf{T}^k$, and $\boldsymbol{\Theta}^k$ are now reshaped to the tensors $\mathcal{W}$, $\mathcal{T}^k$ and $\boldsymbol{\Theta}^k \in \mathbb{R}^{H \times W \times S}$, respectively, and the $\mathcal{W}$ -subproblem can be solved by the VTV denoising algorithm [51] accelerated by the FISTA framework [52]. We follow the previous work [52] using similar symbols without causing confusion.

Assuming three third-order tensors $\mathcal{R} \in \mathbb{R}^{(H-1) \times W \times S}$ and $\mathcal{S} \in \mathbb{R}^{H \times (W-1) \times S}$ and $\mathcal{N} \in \mathbb{R}^{H \times W \times S}$, a linear operator Γ with respect to $\mathcal{R}$, $\mathcal{S}$ is defined as

$$\Gamma(\mathcal{R}, \mathcal{S})_{i,j,k} = \mathcal{R}_{i,j,k} - \mathcal{R}_{i-1,j,k} + \mathcal{S}_{i,j,k} - \mathcal{S}_{i,j-1,k} \quad (19)$$

where $i = 1, 2, \dots, H$, $j = 1, 2, \dots, W$, and $k = 1, 2, \dots, S$. In particular, all the variables defined in (19) have a zero padding boundary, e.g., $\mathcal{R}_{0,j,k} = 0$ and $\mathcal{R}_{H,j,k} = 0$. The inverse linear operation corresponding to Γ is defined as

$$\Gamma^T(\mathcal{N}) := (\mathcal{R}, \mathcal{S}) \quad (20)$$

where

$$\mathcal{R}_{i,j,k} = \mathcal{N}_{i,j,k} - \mathcal{N}_{i+1,j,k}, \mathcal{S}_{i,j,k} = \mathcal{N}_{i,j,k} - \mathcal{N}_{i,j+1,k}. \quad (21)$$

In addition, the projection operator $\mathbb{P}$ utilized to force $\sum_{k=1}^S (\mathcal{R}_{i,j,k}^2 + \mathcal{S}_{i,j,k}^2) \leq 1$, $|\mathcal{R}_{i,W,k}| \leq 1$ and $|\mathcal{S}_{H,j,k}| \leq 1$ is employed to constrain the fused image to be in a given set. More details can be found in [53].

Based on the above notations and definitions, we can summarize the solution of the $\mathcal{W}$ -subproblem in Algorithm 1. Note that, we need to reunfold the solution $\mathcal{W}^{k+1}$ into a matrix $\mathbf{W}^{k+1}$ along the third dimension after executing Algorithm 1.

- 3) According to the ADMM framework, the Lagrangian multiplier $\boldsymbol{\Theta}$ can be updated by

$$\boldsymbol{\Theta}^{k+1} = \boldsymbol{\Theta}^k + \eta (\mathbf{X}^{k+1} - \tilde{\mathbf{P}} - \mathbf{W}^{k+1}). \quad (22)$$

The stopping criterion of the proposed algorithm is based on the relative change (*relcha*) between two successive fused

Algorithm 1: Algorithm for Updating $\mathcal{W}$.

Input:

$(\mathcal{U}^1, \mathcal{V}^1) = (\mathcal{R}^0, \mathcal{S}^0) = (\mathbf{0}_{(H-1) \times W \times S}, \mathbf{0}_{H \times (W-1) \times S})$, η , λ , $\mathcal{T}^k = \mathcal{X}^{k+1} - \tilde{\mathcal{P}} + \frac{\boldsymbol{\Theta}^k}{\eta}$, $t^1 = 1$.

1: **for** $p = 1$ **to** *maxiteration* **do**

2: $(\mathcal{R}^p, \mathcal{S}^p) =$

$$\mathbb{P}[(\mathcal{U}^p, \mathcal{V}^p) + \frac{\eta}{8\lambda} \Gamma^T(\mathcal{T}^k - \frac{\lambda}{\eta} \Gamma(\mathcal{U}^p, \mathcal{V}^p))]$$

3: $t^{p+1} = \frac{1 + \sqrt{1 + 4(t^p)^2}}{2}$

4: $(\mathcal{U}^{p+1}, \mathcal{V}^{p+1}) =$

$$(\mathcal{R}^p, \mathcal{S}^p) + \frac{t^p - 1}{t^{p+1}} (\mathcal{R}^p - \mathcal{R}^{p-1}, \mathcal{S}^p - \mathcal{S}^{p-1})$$

5: **end for**

Output: $\mathcal{W}^{k+1} = \mathcal{T}^k - \frac{\lambda}{\eta} \Gamma(\mathcal{R}^p, \mathcal{S}^p)$

Algorithm 2: The ADMM-Based Algorithm for the Proposed Model (9).

Input: LRMS image $\mathbf{Y}$, PAN image $\mathbf{P}$, proximal image

$\mathbf{X}_{net}$, λ , α , η , r , p_{mit} , k_{mit} .

Initialization: $\mathbf{X}^0 = \Phi(\mathbf{Y}, r)$, $\mathbf{W}^0 = \boldsymbol{\Theta}^0 = \mathbf{0}$

1: **while** *relcha* $> \varepsilon$ and $k < k_{mit}$ **do**

2: Generate $\tilde{\mathbf{P}}$ via (5)–(6).

3: Update $\mathbf{X}$ via (13)–(15).

4: Update $\mathbf{W}$ via Algorithm 1.

5: Update Lagrange multiplier $\boldsymbol{\Theta}$ via (22).

6: **end while**

Output: Fused HRMS image $\mathbf{X}$

images. In particular, this latter should be less than a tolerance value, ε , i.e.

$$\text{relcha} = \|\mathbf{X}^{k+1} - \mathbf{X}^k\|_F / \|\mathbf{X}^k\|_F < \varepsilon. \quad (23)$$

The proposed algorithm to solve the problem in (9) is summarized in Algorithm 2. The convergence of the proposed iterative approach is guaranteed [46]. In Algorithm 2, p_{mit} and k_{mit} are the maximum iterations of the inner and the outer layers, and Φ indicates the upsampling operation using bicubic interpolation.

V. EXPERIMENTAL RESULTS

This section is devoted to the comparison between the proposed method and some state-of-the-art approaches using several datasets acquired by different sensors. A true color representation is selected for the qualitative analysis of the fused results. Furthermore, all the methods are run in MATLAB (R2016a) on a computer of 16 Gb RAM and Intel(R) Core(TM) i5-4590 CPU: @3.30 GHz.

In order to assess the quality of the different methods, some popular quality indexes are adopted. In particular, the dimensionless global error in synthesis (ERGAS) index [54], the spectral angle mapper (SAM) index [55], the $Q2^n$ ($Q8$ for 8-band datasets and $Q4$ for 4-band datasets) index [56], the peak signal-to-noise ratio (PSNR), and the structural similarity index (SSIM) [57] have been selected. According to the statistics in [16], the first three metrics are the most widely used in pansharpening studies. However, even the PSNR and SSIM are

widely used to evaluate the similarity between two images in the image processing literature. The ideal values for SAM and ERGAS are 0, for $Q2^n$ and SSIM are 1, whereas $+\infty$ for PSNR. Furthermore, the scale factors for all the datasets are 4, i.e., $r = 4$ and the tolerance value is set to $\varepsilon = 2 \times 10^{-4}$. A deeper discussion on the parameters tuning can be found in Section V-E.

In order to have a more compact experimental analysis, we need to fix a specific DCNN approach that generates the $\mathcal{X}_{\text{net}}$. Many state-of-the-art DCNN-based methods for pansharpening can be found, e.g., [2], [28]–[30]. In our experiments, the PanNet proposed by Yang *et al.* [2] is selected to determinate the PDI term. More DCNN options are discussed in Section V-E.

A. Datasets

In our experiments, different datasets are exploited to demonstrate the superiority of the proposed approach. Some datasets are freely available at the website.¹ The exploited datasets are as follows:

- 1) The Rio and the Tripoli datasets both captured by the WorldView-3 sensor with an MS image with eight spectral bands and a PAN image at spatial resolution of 0.3 m.
- 2) The WashingtonDC and the Stockholm datasets acquired by the WorldView-2 sensor including an MS image with eight spectral bands and a PAN image with a spatial resolution of 0.4 m.
- 3) The Toulouse dataset acquired by the IKONOS sensor over the city of Toulouse (France) with an MS image consisting of four spectral bands and a PAN image at spatial resolution of 1.0 m.
- 4) The *Pléiades2 dataset* acquired by the Pléiades sensor with an MS image consisting of four spectral bands and a PAN with a spatial resolution of 0.5 m.

B. Benchmark

The following state-of-the-art methods are used for comparison.

- 1) EXP: MS image interpolation, using a polynomial kernel with 23 coefficients [58].
- 2) MTF-GLP-HPM: MTF—generalized laplacian pyramid with high-pass modulation injection model [1].
- 3) GLP-Reg-FS: MTF—generalized laplacian pyramid and a new full resolution regression-based injection model [25].
- 4) CVPR19: variational pansharpening approach with local gradient constraint [4].
- 5) DiCNN: pansharpening method via detail injection-based convolutional neural networks [30].
- 6) PanNet: a DCNN method for pansharpening [2].

It is worth to be remarked that the source codes of the approaches into the benchmark are available either at the website² or the authors' homepages. In order to have a fair comparison, we adjust the parameters of these methods to get their best performance.

C. Reduced Resolution Assessment

Reduced resolution (simulated) data are obtained according to Wald's protocol [59], i.e., by filtering with filters designed to match the MS sensor's MTFs and decimation [23], [60]. We consider the degraded PAN image as the input PAN image, similarly, the original LRMS and its degraded version play the role of the reference (GT) HRMS image and the input LRMS image, respectively.

1) *Reduced Resolution Rio Dataset*: In this experiment, λ , α , and η are empirically set to 0.011, 0.50, and 0.1, respectively. Fig. 4 shows the visual results and the related mean absolute error (MAE) maps for all the methods. In Fig. 4, we clearly observe that our approach achieves excellent performance. The traditional methods, i.e., MTF-GLP-HPM, GLP-Reg-FS, and CVPR19, preserve the spectral information, but loosing many spatial details. Although DiCNN and PanNet achieve excellent results, our approach shows its superiority obtaining a better residual map. This analysis is corroborated by the calculation of the quality indexes reported in Table I(a). Our method clearly obtains the best results for all the quality indexes.

2) *Reduced Resolution Tripoli Dataset*: In this experiment, the reduced resolution (simulated) Tripoli dataset is employed to further verify the superiority of our model on WorldView-3 data, the same parameters as for the reduced resolution Rio experiment are exploited. Table I(b) summarizes the quantitative results showing the best performance of the proposed approach whatever the quality index. The average running time is also reported in Table I. The MTF-GLP-HPM and the GLP-Reg-FS are classical approaches, thus showing a limited computational burden. Even the PanNet and the DiCNN, belonging to the ML class, have a reduced computational effort during the test phase. However, our approach compared to another one in the same (VO) class, i.e., the CVPR19, shows a reduced running time. Thus, this analysis, computed on a patch of 256×256 pixels, demonstrates that the computational burden of the proposed approach can be considered acceptable for addressing a real image fusion problem.

3) *Reduced Resolution WashingtonDC Dataset*: In this experiment, λ , α , and η are empirically set to 0.003, 0.43, and 0.1, respectively. Fig. 5 shows the visual performance and the corresponding MAE maps. It is clear that the proposed method preserves details in a better way than the other methods, which have evident spatial blurring. From the MAE maps, we can find that only our method restores the vertical stripe structure. In Table II(a), the quality indexes are calculated. Our method still outperforms the other approaches into the benchmark.

4) *Reduced Resolution Stockholm Dataset*: In this experiment, the set of the parameters is slightly adjusted. In particular, λ and α are equal to 0.012 and $= 0.44$, respectively. Instead, η is the same as in the previous test case. The performance of all the methods are reported in Table II(b). Our method shows its clear superiority with respect to all the other techniques, in particular, even compared to the PanNet and the DiCNN. Finally, the computational analysis in Table II is in line with the previously obtained results.

¹[Online]. Available: <http://www.digitalglobe.com/samples?search=Imagery>

²[Online]. Available: <http://openremotesensing.net/kb/codes/pansharpening/>

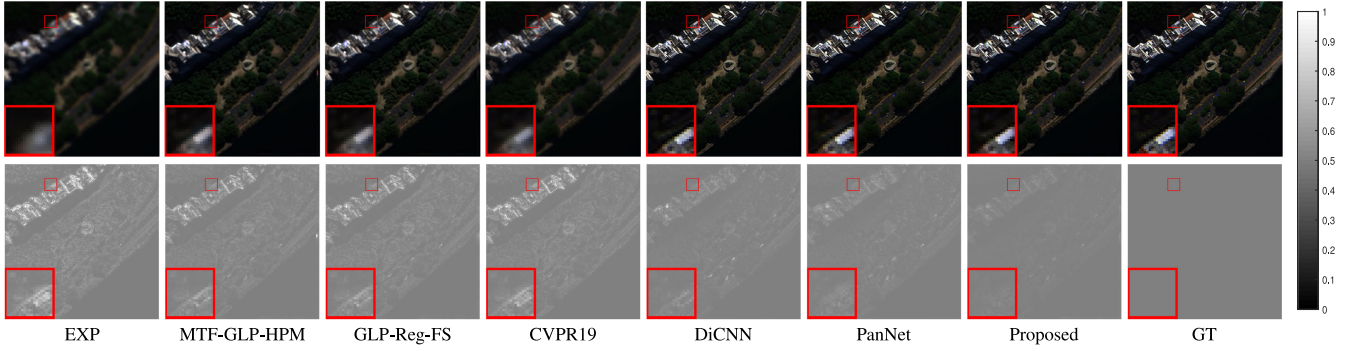


Fig. 4. Fusion results on the reduced resolution (simulated) Rio dataset (source: WorldView-3). Top row: the visual performance of the EXP, MTF-GLP-HPM, GLP-Reg-FS, CVPR19, DiCNN, PanNet, Proposed method, and the GT image, respectively. Bottom row: the corresponding MAE maps using the GT image as reference. For a better visualization, we doubled the intensities of the MAE maps and added 0.5.

TABLE I
QUALITY METRICS FOR ALL THE COMPARED APPROACHES ON THE REDUCED RESOLUTION (SIMULATED) RIO AND TRIPOLI DATASETS, RESPECTIVELY

Method	(a) Rio					(b) Tripoli					Average time(s)
	ERGAS	SAM	Q8	PSNR	SSIM	ERGAS	SAM	Q8	PSNR	SSIM	
EXP	8.9481	6.3662	0.6775	29.3264	0.7872	4.8097	4.1088	0.8173	27.7309	0.7104	0.03
MTF-GLP-HPM	6.3748	5.7967	0.7996	31.0209	0.8867	2.9489	3.9725	0.9301	31.9819	0.8876	0.29
GLP-Reg-FS	6.6462	6.2046	0.7867	31.7901	0.8746	2.9339	3.8925	0.9312	31.9857	0.8900	0.38
CVPR19	7.0125	5.6664	0.7681	31.4024	0.8701	3.5465	3.8256	0.9017	30.4052	0.8515	20.26
DiCNN	3.8738	<u>4.2262</u>	0.8600	<u>36.4007</u>	0.9526	<u>2.0734</u>	<u>3.1568</u>	<u>0.9649</u>	<u>34.8528</u>	<u>0.9390</u>	<u>0.22</u>
PanNet	<u>3.8588</u>	4.4518	<u>0.8643</u>	36.3447	<u>0.9529</u>	2.1272	3.1887	0.9648	34.5557	0.9367	0.41
Proposed	3.6266	4.0229	0.8718	36.7143	0.9556	1.9491	3.0014	0.9694	35.1881	0.9413	4.22
Ideal value	0	0	1	$+\infty$	1	0	0	1	$+\infty$	1	-

(Bold: Best; Underline: Second Best).

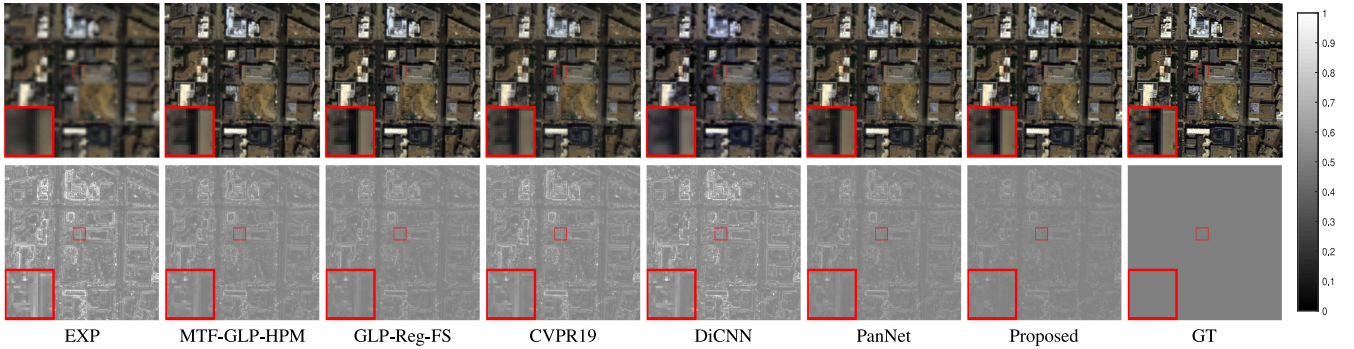


Fig. 5. Fusion results on the reduced resolution (simulated) WashingtonDC dataset (source: WorldView-2). Top row: the visual performance of the EXP, MTF-GLP-HPM, GLP-Reg-FS, CVPR19, DiCNN, PanNet, Proposed method, and the GT image, respectively. Bottom row: the corresponding MAE maps using the GT image as reference. For a better visualization, we doubled the intensities of the MAE maps and added 0.5.

TABLE II
QUALITY METRICS FOR ALL THE COMPARED APPROACHES ON THE REDUCED RESOLUTION (SIMULATED) WASHINGTONDC AND THE STOCKHOLM DATASETS, RESPECTIVELY

Method	(a) WashingtonDC					(b) Stockholm					Average time(s)
	ERGAS	SAM	Q8	PSNR	SSIM	ERGAS	SAM	Q8	PSNR	SSIM	
EXP	6.7945	6.6693	0.7305	24.2532	0.5367	10.5392	7.6555	0.6536	24.8813	0.6398	0.03
MTF-GLP-HPM	4.4810	6.1534	0.8950	27.9970	0.8059	7.3327	6.8871	0.8339	27.8446	0.8338	0.23
GLP-Reg-FS	4.2127	5.8836	0.9090	28.5064	0.8321	7.3569	7.0824	0.8399	28.2198	0.8392	0.26
CVPR19	4.9324	5.9979	0.8651	27.1235	0.7688	8.1130	6.9643	0.7939	27.2945	0.7987	20.17
DiCNN	5.9310	7.0829	0.8200	25.4925	0.6852	6.7927	6.9590	0.8586	28.6846	0.8608	<u>0.22</u>
PanNet	<u>4.0688</u>	<u>5.4871</u>	<u>0.9138</u>	<u>28.7873</u>	<u>0.8415</u>	<u>6.4703</u>	<u>6.4899</u>	<u>0.8657</u>	<u>29.1310</u>	<u>0.8700</u>	0.41
Proposed	3.8175	5.2298	0.9260	29.4152	0.8562	6.2653	6.2571	0.9062	29.6430	0.8776	4.08
Ideal value	0	0	1	$+\infty$	1	0	0	1	$+\infty$	1	-

(Bold: Best; Underline: Second Best).

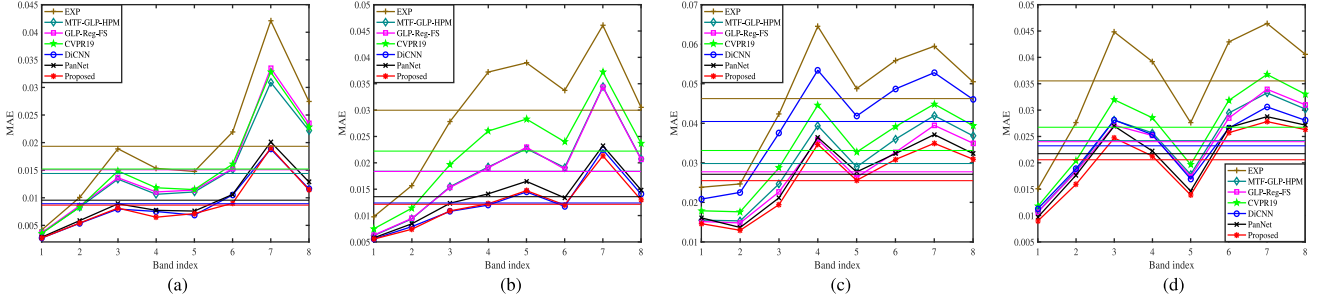


Fig. 6. Spectral MAE curves for all the methods on the reduced resolution (simulated) datasets: (a) Rio dataset, (b) Tripoli dataset, (c) WashingtonDC dataset, and (d) Stockholm dataset. The horizontal lines represent the average value of the MAEs calculated for all the spectral bands. The lower the value, the better the performance.

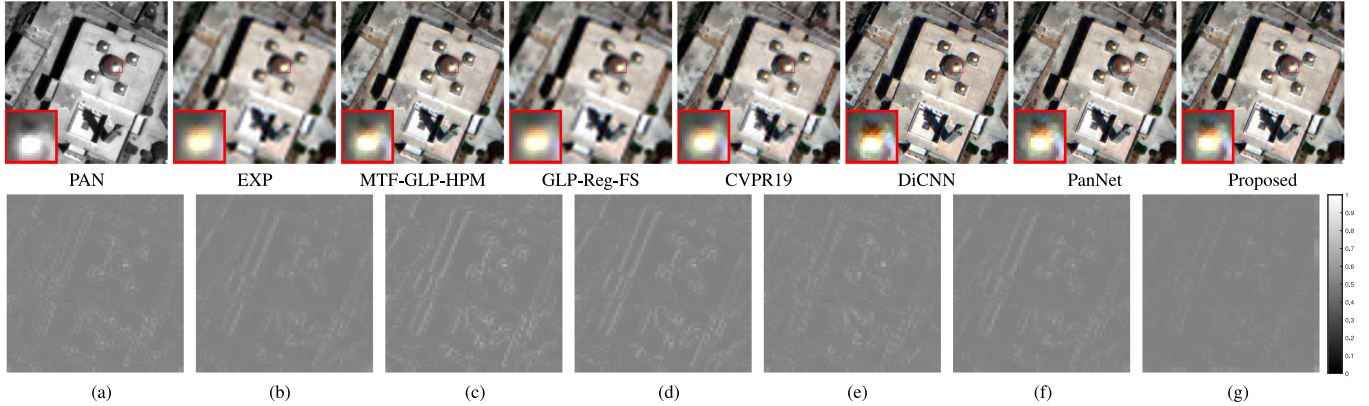


Fig. 7. Fusion results on the full resolution Tripoli dataset (source: WorldView-3). Top row: the PAN image, the visual performance of all the methods: (a) EXP, (b) MTF-GLP-HPM, (c) GLP-Reg-FS, (d) CVPR19, (e) DiCNN, (f) PanNet and (g) Proposed method. Bottom row: the MAE maps between the degraded fusion outcome (by filtering with MTF-based filters and decimation) and the LRMS image. For a better visualization, we doubled the intensities of the MAE maps and added 0.5.

Finally, the MAEs calculated for each spectral bands of the fused products obtained by the methods into the benchmark are depicted in Fig. 6 for the four simulated test cases. The horizontal lines indicate the average along the spectral dimension of the MAE values for each method. The lower the value, the better the performance. For all the test cases, it is clear to see that the proposed approach gets the best results, i.e., the smallest average of the band-dependent MAEs indicating a fused image close to the reference (GT) image.

D. Full Resolution Assessment

To corroborate the results obtained at reduced resolution, the proposed model is tested on real dataset at full resolution, i.e., without degrading the original MS and PAN data according to Wald's protocol. For these experiments, the full resolution Tripoli and Stockholm datasets are employed. Unlike reduced resolution (simulated) experiments, where a reference (GT) image is available, in this case, no reference can be exploited to assess the performance. Fortunately, metrics without reference have been proposed in the related literature. In particular, the *quality with no reference* (QNR) [61] consisting of a spectral distortion index D_λ and a spatial distortion index D_s is often adopted to this aim.

1) *Full Resolution Tripoli Dataset*: In this experiment, we use the same parameters as for the reduced resolution Rio experiment, i.e., $\lambda = 0.011$, $\alpha = 0.50$, and $\eta = 0.1$. Fig. 7 shows the fusion results and the MAE maps comparing the degraded version (based on the MTF filtering [60]) of the fused image with the original LRMS image in order to have a quick look about the consistency of the fusion products. In Fig. 7, we can note that the proposed model achieves similar details compared to the PAN ones. Furthermore, from the MAEs in Figs. 7(a)–(g), we can note a good consistency of our approach with respect to the compared methods. The metrics D_λ , D_s , and QNR are reported in Table III(a). We can remark that our method yields the best performance in terms of D_s and QNR metrics making an excellent tradeoff between the spectral fidelity and the spatial enhancement.

2) *Full Resolution WashingtonDC Dataset*: In this experiment, we slightly tune the parameters λ , α and η . Thus, the used values are $\lambda = 0.025$, $\alpha = 0.57$, and $\eta = 0.1$. The visual performance and corresponding MAE maps are depicted in Fig. 8. Our method together with the MTF-GLP-HPM obtain the lowest values in the related MAE maps, thus getting generally good performance from a spectral point of view. The CVPR19 and the GLP-Reg-FS outcomes are highly distorted from a spatial point of view. The DiCNN and PanNet outcomes suffer from both spatial and spectral distortions. The quality indexes

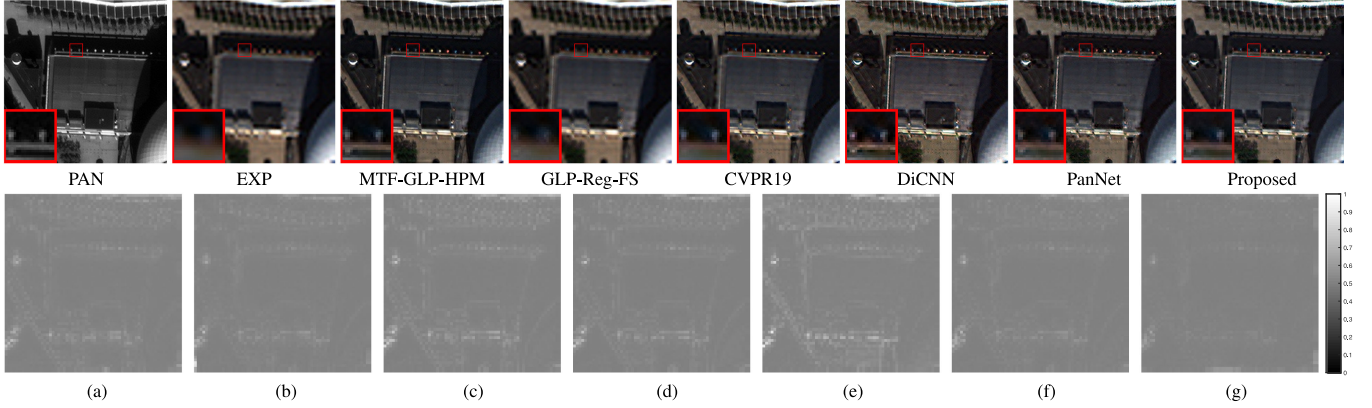


Fig. 8. Fusion results on the full resolution Stockholm dataset (source: WorldView-2). Top row: the PAN image, the visual performance of all the methods: (a) EXP, (b) MTF-GLP-HPM, (c) GLP-Reg-FS, (d) CVPR19, (e) DiCNN, (f) PanNet and (g) Proposed method. Bottom row: the MAE maps between the degraded fusion outcome (by filtering with MTF-based filters and decimation) and the LRMS image. For a better visualization, we doubled the intensities of the MAE maps and added 0.5.

TABLE III
QUALITY METRICS ON THE FULL RESOLUTION (A) TRIPOLI
AND (B) STOCKHOLM DATASETS

Method	(a) Real Tripoli			(b) Real Stockholm			Average time(s)
	D_λ	D_s	QNR	D_λ	D_s	QNR	
EXP	0.0008	0.0332	0.9660	<u>0.0042</u>	0.0902	0.9060	0.03
MTF-GLP-HPM	0.0130	0.0194	0.9678	0.0213	0.0216	0.9576	0.26
GLP-Reg-FS	0.0008	0.0320	0.9673	0.0018	0.0582	0.9401	0.25
CVPR19	<u>0.0031</u>	0.0230	0.9740	0.0103	0.0266	0.9634	20.10
DiCNN	0.0065	0.0167	0.9770	0.0283	0.0364	0.9363	<u>0.22</u>
PanNet	0.0039	<u>0.0084</u>	<u>0.9878</u>	0.0186	<u>0.0155</u>	<u>0.9661</u>	0.41
Proposed	0.0037	0.0048	0.9915	0.0135	0.0060	0.9806	4.93
Ideal value	0	0	1	0	0	1	-

(Bold: Best; Underline: Second Best).

at full resolution are reported in Table III(b). The GLP-Reg-FS gets the best D_λ index, whereas the proposed method has the best performance in terms of D_s and the overall QNR index. This means that the proposed approach has comprehensive advantages with respect to the benchmark.

In summary, the broad experiments on datasets both at reduced resolution (simulated) and at full resolution show that the proposed method gets very high performance, both qualitatively and quantitatively, with respect to the benchmark. In particular, for the Rio and the Tripoli datasets, although the PanNet method achieves very high performance, the proposed approach is still able to improve them. Instead for the WashingtonDC and the Stockholm datasets, where the performance of the PanNet is not outstanding, high performance of the proposed framework is still obtained. It is worth to be remarked that the fine-tuning of the parameters of the proposed method on the WorldView-3 datasets can lead to better results, but a fixed set of parameters has been selected in order to show the robustness of the proposed method.

E. Discussion

This section is devoted to some discussions about the proposed approach, such as the parameter tuning and the ablation

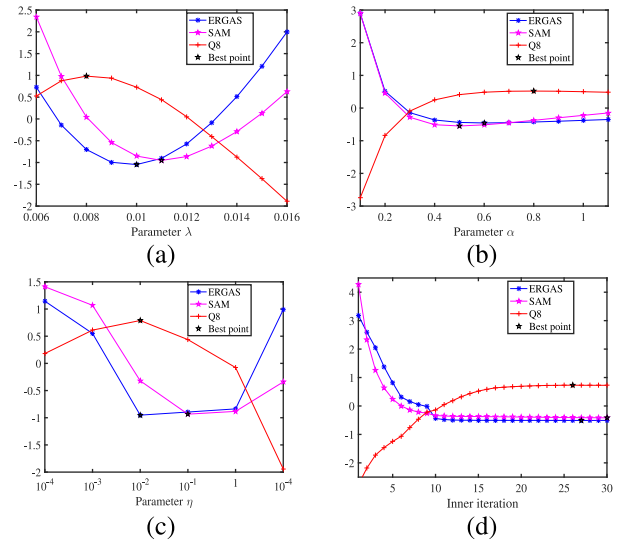


Fig. 9. ERGAS, SAM, Q8 curves for: the regularization parameters (a) λ and (b) α , (c) the penalty parameter η and (d) the inner iteration p_{mit} . The best points are pointed out with a black star. Note that for better comparisons, we process the obtained indexes by $(index - \mathcal{M}(index))/\mathcal{S}(index)$, where $\mathcal{M}(\cdot)$ and $\mathcal{S}(\cdot)$ represent the mean and standard deviation operations, respectively. Besides, the real mean and standard deviation for ERGAS, SAM and Q8 are (a) 3.6479 ± 0.0156 ; 4.0454 ± 0.0131 ; 0.8714 ± 0.0021 ; (b) 3.7763 ± 0.3106 ; 4.1580 ± 0.2309 ; 0.8667 ± 0.0124 ; (c) 3.6747 ± 0.0392 ; 4.1331 ± 0.1090 ; 0.8706 ± 0.0027 ; (d) 3.6400 ± 0.0008 ; 4.0346 ± 0.0094 ; 0.8720 ± 0.0004 ; respectively.

study. For the sake of brevity, all the discussions (except for the generalization analysis) are related to the reduced resolution Rio dataset exploiting the main quality metrics, i.e., the EGRAS, the SAM, and the overall quality index Q8.

1) *Parameter Tuning*: Five parameters are related to our approach, i.e., λ , α , η , p_{mit} and k_{mit} . In particular, k_{mit} is used to prevent the algorithm from iterating endlessly, thus it can be appropriately set to a high number. Fig. 9 depicts the performance varying the other parameters. All the parameters are fixed except for the parameter that we want to analyze. Figs. 9(a) and (b) show that only slight changes can happen varying both λ and

TABLE IV
QUALITY METRICS OF THE DIFFERENT MODELS ON THE REDUCED
RESOLUTION (SIMULATED) RIO DATASET

Method	<i>ERGAS</i>	<i>SAM</i>	<i>Q8</i>
Model (24)	3.8396	4.3530	0.8661
Model (25)	<u>3.7174</u>	<u>4.2823</u>	<u>0.8708</u>
Model (26)	6.5851	5.6281	0.7945
PanNet	3.8588	4.4518	0.8643
Proposed	3.6266	4.0229	0.8716
Ideal value	0	0	1

(Bold: Best; Underline: Second Best).

α demonstrating the robustness of our method with respect to these parameters. Fig. 9(c) shows that the proposed method is almost insensitive to the penalty parameter η in the adopted range of values $10^{-2} \leq \eta \leq 10^1$. Finally, Fig. 9(d) depicts a sharply convergence by increasing the number of the inner iterations p . However, the higher the number of iterations, the higher computational burden. For this reason, we set p_{mit} to 10 in our study considering the balance between computation and performance.

2) *Ablation Study*: In order to have deeper insights about our approach, we conducted an ablation study on the proposed model generating the following three corresponding submodels:

$$\min_{\mathbf{X}} \left\| \nabla \tilde{\mathbf{P}} - \nabla \mathbf{X} \right\|_{2,1}^2 + \alpha \left\| \mathbf{X}_{\text{net}} - \mathbf{X} \right\|_F^2 \quad (24)$$

$$\min_{\mathbf{X}} \left\| \mathbf{XBS} - \mathbf{Y} \right\|_F^2 + \alpha \left\| \mathbf{X}_{\text{net}} - \mathbf{X} \right\|_F^2 \quad (25)$$

and

$$\min_{\mathbf{X}} \left\| \mathbf{XBS} - \mathbf{Y} \right\|_F^2 + \lambda \left\| \nabla \tilde{\mathbf{P}} - \nabla \mathbf{X} \right\|_{2,1}^2. \quad (26)$$

Based on these models, we design the algorithm, again, performing the tests using optimal parameters for a fair comparison. The performance are reported in Table IV. We can observe that the model (25) is the second best approach (after the proposed one), even obtaining optimal spectral features. Furthermore, the fusion performance of the model (26) is competitive to that of the traditional methods in Table I(a). Finally, the advantages in using the PDI term can be also assessed by having a look at the performance of the PanNet, which is used to determinate the PDI term of the proposed approach.

3) *Generalization Analysis*: In order to assess the ability of generalization of the proposed approach, we performed additional experiments using both an IKONOS dataset and a Pléiades dataset. In these tests, the PanNet is trained on the second (blue), the third (green), the fifth (red), and the seventh (near infra-red) bands of a WorldView-3 dataset, thus considering the spectral responses of both the IKONOS and the Pléiades sensors and the WorldView-3 ones. The fusion results are depicted in Fig. 10 and the quantitative outcomes are reported in Table V. It is clear to show that the proposed method achieves the best performance in all the cases and by using all the indexes. Thus, the generalization ability of the proposed approach is clearly demonstrated with respect to an approach based on a training by example philosophy as the PanNet (i.e., a DCNN).

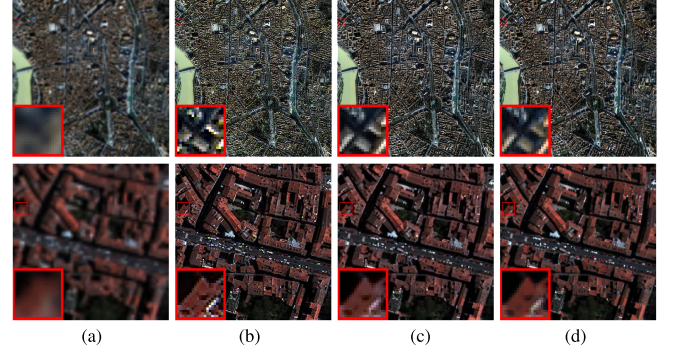


Fig. 10. Top row: the fusion results on the reduced resolution (simulated) Toulouse dataset (source: IKONOS). Bottom row: the fusion results on the reduced resolution (simulated) Pléiades2 dataset (source: Pléiades). (a) EXP. (b) PanNet. (c) Proposed. (d) GT.

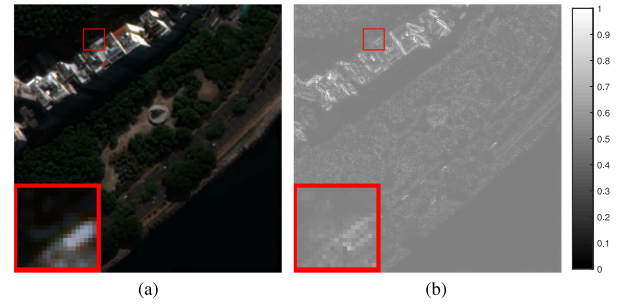


Fig. 11. Performance over the outer iterations for the models that use the $\mathcal{P}$ and $\tilde{\mathcal{P}}$, respectively, on the reduced resolution (simulated) Rio dataset. It is worth to be remarked that optimal parameter configurations for both the models are used for fairness.

TABLE V
QUALITY METRICS ON THE REDUCED RESOLUTION (SIMULATED)
TOULOUSE AND PLÉIADÉS2 DATASETS

Dataset	PAN size	Method	<i>ERGAS</i>	<i>SAM</i>	<i>Q4</i>
Toulouse	512×512	PanNet	<u>5.8152</u>	<u>5.5342</u>	0.7180
		Proposed	3.1948	3.5488	0.8943
Pléiades2	256×256	PanNet	<u>5.5887</u>	<u>5.9802</u>	<u>0.8417</u>
		Proposed	2.6649	4.0249	0.9522
Ideal value			0	0	1

(Bold: Best; Underline: Second Best).

4) *GISC Effect*: In order to assess the improvement in using the proposed GISC, we show in Fig. 12 the curves over the outer iterations of the quality indexes *ERGAS*, *SAM*, and *Q8* using $\tilde{\mathcal{P}}$ and $\mathcal{P}$, i.e., with and without GISC, respectively. The advantages in using the proposed approach based on $\tilde{\mathcal{P}}$ are clear. Thus, the rationale of using the proposed term relied upon $\tilde{\mathcal{P}}$ is experimentally proved.

5) *$\mathbf{X}_{\text{net}}$ Generalization*: In this section, the output of the PanNet has been used to feed the PDI term showing high performance. However, all the fused results coming from ML approaches can be theoretically used in the proposed VO framework. This is based on the idea that in the output of an ML-based approach the prior knowledge learned during the training phase is present. Thus, this latter can be exploited by the proposed

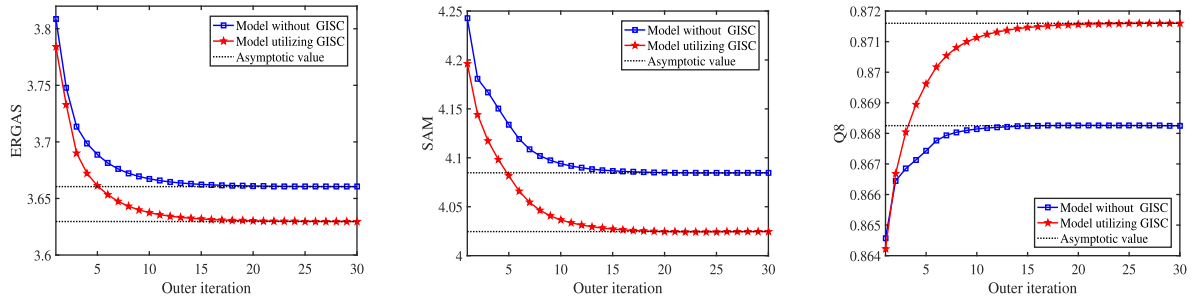


Fig. 12. The performance over the outer iterations for the models that use the $\mathcal{P}$ and $\tilde{\mathcal{P}}$, respectively, on the reduced resolution (simulated) Rio dataset. It is worth to be remarked that optimal parameter configurations for both the models are used for fairness.

TABLE VI
QUALITY METRICS COMPARING THE PROPOSED APPROACH
WITH TWO DIFFERENT PDI TERMS ON THE REDUCED
RESOLUTION (SIMULATED) RIO DATASET

Method	ERGAS	SAM	Q8
PanNet	3.8588	4.4518	0.8643
DiCNN	3.8738	4.2262	0.8600
PanNet-based	3.6266	<u>4.0229</u>	<u>0.8716</u>
DiCNN-based	<u>3.6267</u>	4.0177	0.8743
Ideal value	0	0	1

(Bold: Best; Underline: Second Best).

TABLE VII
QUALITY METRICS AND RUN TIMES OF THE DIFFERENT APPROACHES
ON THE REDUCED RESOLUTION (SIMULATED) RIO DATASET

Method	ERGAS	SAM	Q8	Time(s)
FUSE	<u>5.2765</u>	<u>6.8140</u>	<u>0.7918</u>	0.0003
Proposed	3.6266	4.0229	0.8716	<u>4.2095</u>
Ideal value	0	0	1	-

(Bold: Best; Underline: Second Best).

approach. In order to corroborate the last statement, the proposed VO framework is also used with the output of the DiCNN method. We call this fusion result *DiCNN-based* from hereon. The quantitative results are reported in Table VI showing that both the approaches based on two different PDI (regularization) terms achieve higher performance than the DCNN-based ones. Furthermore, the two outcomes obtained by feeding our framework with different prior information have comparable performance. This proves the possibility to generalize with respect to various proximal DCNNs.

6) *Algorithm Relation*: It is worth to be noted that the sub-problem of $\mathbf{X}$ in Section IV can be encoded based on diagonalizing matrix $\mathbf{B}$ and exploiting the characteristics of $\mathbf{S}$ for higher computational efficiency [62]–[64]. In [41], Wei *et al.* proposed a new methodology, named FUSE,³ via analytically and efficiently solving a Sylvester equation. Starting from this consideration, a comparison with the approach in [41] should be performed both from a performance and a computational points of view. Fig. 11 and Table VII report the results. As can be seen from the pan-sharpened products and the quality indexes,

the fused image provided by FUSE demonstrates a better quality than almost all the traditional methods. However, some flaws, e.g., a clear spectral distortion which may be caused by a biased estimate of the spectral response function, are evident. Therefore, our scheme is still very promising.

VI. CONCLUSION

In this paper, we have proposed a variational model requiring a regularization based on the proposed PDI term in order to address the pansharpening problem. In particular, the novelty of our model is that we make a link between VO approaches and DCNN methods, thanks to the formulation of the PDI term. Furthermore, the use of MTF-based filters and a new RePAN image exploiting GISC have been introduced in this paper to improve the spatial fidelity data fitting term. An efficient ADMM-based algorithm has been developed to solve the proposed problem guaranteeing the convergence to a global optimum. A broad experimental analysis conducted on several acknowledged datasets both at reduced resolution and at full resolution has demonstrated the superiority of the proposed approach with respect to a benchmark consisting of several state-of-the-art approaches. In particular, the robustness with respect to the selection of the algorithm's parameters and the generalization abilities of the proposed VO framework have been pointed out together with a detailed ablation study. Future developments go towards the extension of the proposed approach to the hyperspectral image superresolution problem and the development of techniques to determinate regularization parameters, thus reducing the complexity of the parameters setting phase and, at the same time, improving the performance in real practical cases.

REFERENCES

- [1] B. Aiazzi, L. Alparone, S. Baronti, A. Garzelli, and M. Selva, "An MTF-based spectral distortion minimizing model for pan-sharpening of very high resolution multispectral images of urban areas," in *Proc. 2nd GRSS/ISPRS Joint Workshop Remote Sens. Data Fusion Over Urban Areas*, 2003, pp. 90–94.
- [2] J. F. Yang, X. Y. Fu, Y. W. Hu, Y. Huang, X. H. Ding, and J. Paisley, "Pannet: A deep network architecture for pan-sharpening," in *Proc. IEEE Int. Conf. Comput. Vision*, 2017, pp. 5449–5457.
- [3] H. F. Shen, X. C. Meng, and L. P. Zhang, "An integrated framework for the spatio-temporal-spectral fusion of remote sensing images," *IEEE Trans. Geosci. Remote Sens.*, vol. 54, no. 12, pp. 7135–7148, Dec. 2016.

³[Online]. Available: <http://dobleon.perso.enseiht.fr/publis.html>

- [4] X. Y. Fu, Z. H. Lin, Y. Huang, and X. H. Ding, "A variational pansharpening with local gradient constraints," in *Proc. IEEE Conf. Comput. Vision Pattern Recognit.*, 2019, pp. 10265–10274.
- [5] L. J. Deng, W. H. Guo, and T. Z. Huang, "Single-image super-resolution via an iterative reproducing kernel Hilbert space method," *IEEE Trans. Circuits Syst. Video Technol.*, vol. 26, no. 11, pp. 2001–2014, Nov. 2016.
- [6] M. Imani, "Band dependent spatial details injection based on collaborative representation for pansharpening," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 11, no. 12, pp. 4994–5004, Dec. 2018.
- [7] R. W. Dian, S. T. Li, L. Y. Fang, T. Lu, and J. M. Bioucas-Dias, "Nonlocal sparse tensor factorization for semiblind hyperspectral and multispectral image fusion," *IEEE Trans. Cybern.*, vol. 50, no. 10, pp. 4469–4480, Oct. 2020.
- [8] T. Xu, T. Z. Huang, L. J. Deng, X. L. Zhao, and J. Huang, "Hyperspectral image superresolution using unidirectional total variation with Tucker decomposition," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 13, pp. 4381–4398, 2020.
- [9] P. Chavez *et al.*, "Comparison of three different methods to merge multiresolution and multispectral data-landsat TM and SPOT panchromatic," *Photogrammetric Eng. Remote Sens.*, vol. 57, no. 3, pp. 295–303, 1991.
- [10] L. J. Deng, M. Y. Feng, and X. C. Tai, "The fusion of panchromatic and multispectral remote sensing images via tensor-based sparse modeling and hyper-laplacian prior," *Inform. Fusion*, vol. 52, pp. 76–89, 2019.
- [11] Z. Y. Zhang, T. Z. Huang, L. J. Deng, J. Huang, and H. X. Dou, "Pansharpening via RoG-based filtering," in *Proc. IEEE Int. Geosci. Remote Sens. Symp.*, 2019, pp. 2790–2793.
- [12] J. Liu, L. J. Deng, F. M. Fang, and T. Y. Zeng, "A Rudin-Osher-Fatemi model-based pansharpening approach using RKHS and AHF representation," *East Asian J. Appl. Math.*, vol. 9, no. 1, pp. 13–27, 2019.
- [13] L. J. Deng, G. Vivone, W. H. Guo, M. Dalla Mura, and J. Chanussot, "A variational pansharpening approach based on reproducible kernel Hilbert space and Heaviside function," *IEEE Trans. Image Process.*, vol. 27, no. 9, pp. 4330–4344, Sep. 2018.
- [14] Y. Yang, L. Wu, S. Y. Huang, Y. J. Tang, and W. G. Wan, "Pansharpening for multiband images with adaptive spectral intensity modulation," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 11, no. 9, pp. 3196–3208, 2018.
- [15] Y. Yang, L. Wu, S. Y. Huang, W. G. Wan, W. Tu, and H. Y. Lu, "Multiband remote sensing image pansharpening based on dual-injection model," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 13, pp. 1888–1904, 2020.
- [16] X. C. Meng, H. F. Shen, H. F. Li, L. P. Zhang, and R. D. Fu, "Review of the pansharpening methods for remote sensing images based on the idea of meta-analysis: Practical discussion and challenges," *Inform. Fusion*, vol. 46, pp. 102–113, 2019.
- [17] H. F. Shen, M. H. Jiang, J. Li, Q. Q. Yuan, Y. C. Wei, and L. P. Zhang, "Spatial-spectral fusion by combining deep learning and variational model," *IEEE Trans. Geosci. Remote Sens.*, vol. 57, no. 8, pp. 6169–6181, Aug. 2019.
- [18] W. Carper, T. Lillesand, and R. Kiefer, "The use of intensity-hue-saturation transformations for merging SPOT panchromatic and multispectral image data," *Photogrammetric Eng. Remote Sens.*, vol. 56, no. 4, pp. 459–467, 1990.
- [19] P. Kwarteng and A. Chavez, "Extracting spectral contrast in Landsat Thematic Mapper image data using selective principal component analysis," *Photogrammetric Eng. Remote Sens.*, vol. 55, no. 1, pp. 339–348, 1989.
- [20] A. R. Gillespie, A. B. Kahle, and R. E. Walker, "Color enhancement of highly correlated images. II. Channel ratio and chromaticity transformation techniques," *Remote Sens. Environ.*, vol. 22, no. 3, pp. 343–365, 1987.
- [21] C. A. Laben and B. V. Brower, "Process for enhancing the spatial resolution of multispectral imagery using pan-sharpening," U.S. Patent 6,011,875, Jan. 4 2000.
- [22] J. Choi, K. Yu, and Y. Kim, "A new adaptive component-substitution-based satellite image fusion by using partial replacement," *IEEE Trans. Geosci. Remote Sens.*, vol. 49, no. 1, pp. 295–309, Jan. 2011.
- [23] G. Vivone *et al.*, "A critical comparison among pansharpening algorithms," *IEEE Trans. Geosci. Remote Sens.*, vol. 53, no. 5, pp. 2565–2586, May 2015.
- [24] J. G. Liu, "Smoothing filter-based intensity modulation: A spectral preserve image fusion technique for improving spatial details," *Int. J. Remote Sens.*, vol. 21, no. 18, pp. 3461–3472, 2000.
- [25] G. Vivone, R. Restaino, and J. Chanussot, "Full scale regression-based injection coefficients for panchromatic sharpening," *IEEE Trans. Image Process.*, vol. 27, no. 7, pp. 3418–3431, Jul. 2018.
- [26] C. Chen, Y. Q. Li, W. Liu, and J. Z. Huang, "SIRF: Simultaneous satellite image registration and fusion in a unified framework," *IEEE Trans. Image Process.*, vol. 24, no. 11, pp. 4213–4224, Nov. 2015.
- [27] K. Zhang, W. M. Zuo, S. H. Gu, and L. Zhang, "Learning deep CNN denoiser prior for image restoration," in *Proc. IEEE Conf. Comput. Vision Pattern Recognit.*, 2017, pp. 3929–3938.
- [28] W. Huang, L. Xiao, Z. H. Wei, H. Y. Liu, and S. Z. Tang, "A new pansharpening method with deep neural networks," *IEEE Geosci. Remote Sens. Lett.*, vol. 12, no. 5, pp. 1037–1041, May 2015.
- [29] G. Masi, D. Cozzolino, L. Verdoliva, and G. Scarpa, "Pansharpening by convolutional neural networks," *Remote Sens.*, vol. 8, no. 7, 2016, Art. no. 594.
- [30] L. He *et al.*, "Pansharpening via detail injection based convolutional neural networks," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 12, no. 4, pp. 1188–1204, Apr. 2019.
- [31] L. He, J. W. Zhu, J. Li, A. Plaza, J. Chanussot, and B. Li, "Hyperpnn: Hyperspectral pansharpening via spectrally predictive convolutional neural networks," *IEEE J. Sel. Topics Appl. Earth Observ. Remote Sens.*, vol. 12, no. 8, pp. 3092–3100, Aug. 2019.
- [32] Y. C. Wei, Q. Q. Yuan, H. F. Shen, and L. P. Zhang, "Boosting the accuracy of multispectral image pansharpening by learning a deep residual network," *IEEE Geosci. Remote Sens. Lett.*, vol. 14, no. 10, pp. 1795–1799, Oct. 2017.
- [33] Y. Y. Jiang, X. H. Ding, D. L. Zeng, Y. Huang, and J. Paisley, "Pansharpening with a hyper-laplacian penalty," in *Proc. IEEE Int. Conf. Comput. Vision*, 2015, pp. 540–548.
- [34] P. F. Liu, L. Xiao, and T. Li, "A variational pan-sharpening method based on spatial fractional-order geometry and spectral-spatial low-rank priors," *IEEE Trans. Geosci. Remote Sens.*, vol. 56, no. 3, pp. 1788–1802, Mar. 2018.
- [35] T. G. Kolda and B. W. Bader, "Tensor decompositions and applications," *SIAM Rev.*, vol. 51, no. 3, pp. 455–500, 2009.
- [36] A. Garzelli, F. Nencini, and L. Capobianco, "Optimal MMSE pansharpening of very high resolution multispectral images," *IEEE Trans. Geosci. Remote Sens.*, vol. 46, no. 1, pp. 228–236, Jan. 2008.
- [37] R. W. Dian, S. T. Li, A. J. Guo, and L. Y. Fang, "Deep hyperspectral image sharpening," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 29, no. 99, pp. 1–11, Nov. 2018.
- [38] M. Simões, J. Bioucas-Dias, L. B. Almeida, and J. Chanussot, "A convex formulation for hyperspectral image superresolution via subspace-based regularization," *IEEE Trans. Geosci. Remote Sens.*, vol. 53, no. 6, pp. 3373–3388, Jun. 2015.
- [39] M. K. Ng, R. H. Chan, and W. C. Tang, "A fast algorithm for deblurring models with Neumann boundary conditions," *SIAM J. Scientific Comput.*, vol. 21, no. 3, pp. 851–866, 1999.
- [40] Y. L. Wang, J. F. Yang, W. T. Yin, and Y. Zhang, "A new alternating minimization algorithm for total variation image reconstruction," *SIAM J. Imag. Sci.*, vol. 1, no. 3, pp. 248–272, 2008.
- [41] Q. Wei, N. Dobigeon, and J. Y. Tourneret, "Fast fusion of multi-band images based on solving a Sylvester equation," *IEEE Trans. Image Process.*, vol. 24, no. 11, pp. 4109–4121, Nov. 2015.
- [42] G. Vivone, P. Addesso, R. Restaino, M. Dalla Mura, and J. Chanussot, "Pansharpening based on deconvolution for multi-band filter estimation," *IEEE Trans. Geosci. Remote Sens.*, vol. 57, no. 1, pp. 540–553, Jan. 2019.
- [43] G. Vivone *et al.*, "Pansharpening based on semiblind deconvolution," *IEEE Trans. Geosci. Remote Sens.*, vol. 53, no. 4, pp. 1997–2010, Apr. 2015.
- [44] W. Y. Xie, J. Lei, Y. H. Cui, Y. S. Li, and Q. Du, "Hyperspectral pansharpening with deep priors," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 31, no. 5, pp. 1529–1543, May 2020.
- [45] W. S. Dong, *et al.*, "Hyperspectral image super-resolution via non-negative structured sparse representation," *IEEE Trans. Image Process.*, vol. 25, no. 5, pp. 2337–2352, May 2016.
- [46] S. Boyd *et al.*, "Distributed optimization and statistical learning via the alternating direction method of multipliers," *Found. Trends Mach. Learn.*, vol. 3, no. 1, pp. 1–122, 2011.
- [47] J. H. Yang, X. L. Zhao, T. H. Ma, Y. Chen, T. Z. Huang, and M. Ding, "Remote sensing images destriping using unidirectional hybrid total variation and nonconvex low-rank regularization," *J. Comput. Appl. Math.*, vol. 363, pp. 124–144, 2020.
- [48] J. Huang, T. Z. Huang, X. L. Zhao, and L. J. Deng, "Joint-sparse-blocks regression for total variation regularized hyperspectral unmixing," *IEEE Access*, vol. 7, pp. 138779–138791, 2019.
- [49] X. Li, J. Huang, L. J. Deng, and T. Z. Huang, "Bilateral filter based total variation regularization for sparse hyperspectral image unmixing," *Inform. Sci.*, vol. 504, pp. 334–353, 2019.

- [50] C. Chen, Y. Q. Li, W. Liu, and J. Z. Huang, "Image fusion with local spectral consistency and dynamic gradient sparsity," in *Proc. IEEE Conf. Comput. Vision Pattern Recognit.*, 2014, pp. 2760–2765.
- [51] X. Bresson and T. F. Chan, "Fast dual minimization of the vectorial total variation norm and applications to color image processing," *Inverse Prob. Imag.*, vol. 2, no. 4, pp. 455–484, 2008.
- [52] A. Beck and M. Teboulle, "A fast iterative shrinkage-thresholding algorithm for linear inverse problems," *SIAM J. Imag. Sci.*, vol. 2, no. 1, pp. 183–202, 2009.
- [53] A. Beck and M. Teboulle, "Fast gradient-based algorithms for constrained total variation image denoising and deblurring problems," *IEEE Trans. Image Process.*, vol. 18, no. 11, pp. 2419–2434, Nov. 2009.
- [54] L. Alparone, L. Wald, J. Chanussot, C. Thomas, P. Gamba, and L. M. Bruce, "Comparison of pansharpening algorithms: Outcome of the 2006 GRS-S data-fusion contest," *IEEE Trans. Geosci. Remote Sens.*, vol. 45, no. 10, pp. 3012–3021, Oct. 2007.
- [55] R. H. Yuhas, A. F. H. Goetz, and J. W. Boardman, "Discrimination among semi-arid landscape endmembers using the spectral angle mapper (SAM) algorithm," in *Proc. 3rd Summaries Annu. JPL Airborne Geosci. Workshop*, vol. 1, 1992, pp. 147–149.
- [56] L. Alparone, S. Baronti, A. Garzelli, and F. Nencini, "A global quality measurement of pan-sharpened multispectral imagery," *IEEE Geosci. Remote Sens. Lett.*, vol. 1, no. 4, pp. 313–317, Oct. 2004.
- [57] Z. Wang, A. C. Bovik, H. R. Sheikh, and E. P. Simoncelli, "Image quality assessment: From error visibility to structural similarity," *IEEE Trans. Image Process.*, vol. 13, no. 4, pp. 600–612, Apr. 2004.
- [58] B. Aiazzi, L. Alparone, S. Baronti, and A. Garzelli, "Context-driven fusion of high spatial and spectral resolution images based on oversampled multiresolution analysis," *IEEE Trans. Geosci. Remote Sens.*, vol. 40, no. 10, pp. 2300–2312, Oct. 2002.
- [59] G. Vivone, R. Restaino, M. Dalla Mura, G. Licciardi, and J. Chanussot, "Contrast and error-based fusion schemes for multispectral image pansharpening," *IEEE Geosci. Remote Sens. Lett.*, vol. 11, no. 5, pp. 930–934, May 2014.
- [60] B. Aiazzi, L. Alparone, S. Baronti, A. Garzelli, and M. Selva, "MTF-tailored multiscale fusion of high-resolution MS and Pan imagery," *Photogram. Eng. Remote Sens.*, vol. 72, no. 5, pp. 591–596, 2006.
- [61] L. Alparone, B. Aiazzi, S. Baronti, A. Garzelli, F. Nencini, and M. Selva, "Multispectral and panchromatic data fusion assessment without reference," *Photogram. Eng. Remote Sens.*, vol. 74, no. 2, pp. 193–200, 2008.
- [62] R. W. Dian, S. T. Li, and X. D. Kang, "Regularizing hyperspectral and multispectral image fusion by CNN denoiser," *IEEE Trans. Neural Netw. Learn. Syst.*, to be published, doi: [10.1109/TNNLS.2020.2980398](https://doi.org/10.1109/TNNLS.2020.2980398).
- [63] R. W. Dian, S. T. Li, and L. Y. Fang, "Learning a low tensor-train rank representation for hyperspectral image super-resolution," *IEEE Trans. Neural Netw. Learn. Syst.*, vol. 30, no. 9, pp. 2672–2683, Sep. 2019.
- [64] R. W. Dian and S. T. Li, "Hyperspectral image super-resolution via subspace-based low tensor multi-rank regularization," *IEEE Trans. Image Process.*, vol. 28, no. 10, pp. 5135–5146, Oct. 2019.



Zhong-Cheng Wu received the B.S. degree in information and computing science from the Anhui University of Finance and Economics, Bengbu, China, in 2019. He is currently working toward the M.S. degree in mathematic from the School of Mathematical Sciences, University of Electronic Science and Technology of China, Chengdu, China.


His research interests include multispectral image fusion and spectral super-resolution.



Ting-Zhu Huang received the B.S., M.S., and Ph.D. degrees in computational mathematics from the Department of Mathematics, Xi'an Jiaotong University, Xi'an, China, in 1986, 1992, and 2001, respectively.

He is currently a Professor with the School of Mathematical Sciences, University of Electronic Science and Technology of China, Chengdu, China. His research interests include scientific computation and applications, numerical algorithms for image processing, numerical linear algebra, preconditioning technologies, and matrix analysis with applications.

Dr. Huang is an Editor for the *Scientific World Journal*, *Advances in Numerical Analysis*, the *Journal of Applied Mathematics*, the *Journal of Pure and Applied Mathematics: Advances in Applied Mathematics*, and the *Journal of Electronic Science and Technology*, China.



Liang-Jian Deng (Member, IEEE) received the B.S. and Ph.D. degrees in applied mathematics from the School of Mathematical Sciences, University of Electronic Science and Technology of China (UESTC), Chengdu, China, in 2010 and 2016, respectively.

He is currently an Associate Professor with the School of Mathematical Sciences, UESTC. From 2013 to 2014, he was a Joint-Training Ph.D. student with the Case Western Reserve University, Cleveland, OH, USA. In 2017, he was a Postdoc with Hong Kong Baptist University (HKBU). In addition, he also stayed at Isaac Newton Institute for Mathematical Sciences, Cambridge University and HKBU for short visits. His research interests include the use of partial differential equations (PDE), optimization modeling, and deep learning to address several tasks in image processing, and computer vision, e.g., resolution enhancement and restoration.




Gemine Vivone (Senior Member, IEEE) received the B.Sc. and M.Sc. degrees (*summa cum laude*), and the Ph.D. degree from the University of Salerno, Fisciano, Italy, in 2008, 2011, and 2014, respectively, all in information engineering.

He is currently a Researcher with the National Research Council, Rome, Italy. His main research interests include on statistical signal processing, detection of remotely sensed images, data fusion, and tracking algorithms.



Jia-Qing Miao (Member, IEEE) received the B.S. degree from Northeast Petroleum University, Daqing, China, in 2005, the M.S. degree from the School of Mathematical, Northeastern University, Shenyang, China, in 2008, and the Ph.D. degree from the School of Mathematical Sciences, University of Electronic Science and Technology of China, Chengdu, China, all in mathematic.

He is a Visiting Scholar with the Department of Geophysical Engineering, Montana Tech of The University of Montana from 2016 to 2018. He is currently an Associate Professor with the School of Computer Science and Technology, Southwest Minzu University. His current research interests include digital image processing and applications to medical imaging and remote-sensing, including image segmentation, image inpainting, image clustering, compressed sensing, and remotely sensed image reconstruction.



Jin-Fan Hu received the B.S. degree in computational mathematics, in 2019, from the School of Mathematical Sciences, University of Electronic Science and Technology of China (UESTC), Chengdu, China where he is currently working toward the M.S. degree in mathematics.



Xi-Le Zhao received the M.S. and Ph.D. degrees from the University of Electronic Science and Technology of China (UESTC), Chengdu, China, in 2009 and 2012, respectively, both in applied mathematics.

He is currently a Professor with the School of Mathematical Sciences, UESTC. His research interest mainly focus on model-driven and data-driven methods for image processing problems.