

Meta-prediction extends human cortical and subcortical reward learning

Jaehoon Shin¹, Jee Hang Lee^{2,3}, Sang Wan Lee^{1,4,5,6*}

¹*Department of Bio and Brain Engineering, Korea Advanced Institute of Science and Technology (KAIST) 34141 Daejeon, Republic of Korea*

²*Department of Human-Centered Artificial Intelligence, Sangmyung University 03016 Seoul, Republic of Korea*

³*Institute for Advanced Intelligence Study, Daejeon, Republic of Korea*

⁴*Department of Brain and Cognitive Sciences, Korea Advanced Institute of Science and Technology (KAIST)*

⁵*KI for Health Science Technology, KAIST, Daejeon, 34141, Republic of Korea*

⁶*KI for Artificial Intelligence, KAIST, Daejeon, 34141, Republic of Korea*

Summary

Human reward learning is constrained by environmental structure. Stable environments facilitate reward prediction but limit learning experiences¹⁻⁸, while uncertain environments hinder predictability and learnability⁹⁻¹². We propose a novel framework extending these boundaries through "meta-prediction" – predicting human prediction. The meta-prediction entwines two Bellman equations: one for human prediction and the other for predicting the prediction error of the former. The framework pretrains computational models imitating individuals' reward prediction (specification), then generates new tasks to extremize the models' prediction errors (generalization). Simulations with 82 subjects' data generated subject-independent task design across four scenarios without compromising learnability. In an independent fMRI experiment with 49 participants, meta-prediction guides behavior and neural activities in the ventral striatum, lateral prefrontal, and insular cortex, the areas encoding prediction errors. We also demonstrated that meta-prediction can generate complex tasks compositionally to discern human reward learning bias. Our framework redefines the role of tasks in cognitive science and AI.

* Corresponding author. Email: sangwan@kaist.ac.kr

Introduction

Unraveling the intricacies of biological reward learning is a fundamental pursuit that lies at the heart of psychology and cognitive neuroscience. One of its pivotal functions, value computation, is intricately guided by the ability to predict future rewards. Previous research has yielded valuable insights into reward learning, including learning action values for habit formation¹⁻⁴ and using internal models for goal-directed learning⁵⁻⁸. These investigations have primarily relied on a stable environmental setting, which enables confident predictions. However, while such environmental stability accentuates the effect of prediction, it inevitably constrains the breadth of experience and limits the predictive capabilities.

Recent studies have leveraged environmental uncertainty or volatility to examine the nuanced nature of prediction for reward learning⁹⁻¹². Simple predictions cannot accommodate such environments, necessitating high-level prediction strategies where essential functions complement each other, e.g., habit, goal, memory, and intuition^{13,14}. However, these attempts could be undermined by environmental complexity, making it arduous to disentangle different prediction strategies, and environmental noise or volatility, rendering reliable predictions nearly impossible.

This predicament presents the horns of a dilemma: environmental stability and uncertainty limit our ability to predict future events in different ways, setting the functional boundary of prediction. We propose that this fundamental challenge can be handled by predicting human prediction, a concept we term *meta-prediction* (Fig. 1A). The meta-prediction applies the reward prediction principle in machine learning, formulated as Bellman updates¹⁵, to human reward prediction, which can also be specified as Bellman updates (Fig. 1B). Our framework offers greater generalizability than existing task design and optimization schemes^{16,17} in that the former reward prediction module generates any reward learning tasks intended to guide the latter reward prediction processes in various ways (Fig. 1C: specification-generalization).

As a proof-of-concept, the meta-prediction framework focuses on two complementary reward prediction processes guiding goal-directed and habitual behavior: model-free and model-based RL. Specifically, the framework aims to predict the reward prediction error (RPE) and state prediction error (SPE), the two key variables of model-free and model-based RL^{2,6,10,18}. First, we obtained subject-specific human prediction models by fitting the computational model of RL to behavioral data from 82 subjects in a 2-stage goal-directed learning task^{7,8,10}. Second, the meta-prediction module (“meta-prediction” of Fig. 1) was trained to minimize or maximize SPE and/or RPE of the pre-trained human prediction model. We evaluated its validity in two independent fMRI studies with a total of 49 participants. The behavior analyses examined whether and how these interventions influence subjects’ performance and learning speed. The model-based fMRI analyses demonstrated the intervention effects on the neural activities of brain areas known to guide predictions.

Result

Meta-prediction theory

We aim to resolve the following fundamental challenge: our learning experience is constrained

by the environment. In other words, too simple environments offer little to learn, and highly uncertain environments make it hard to learn. The proposed framework, called meta-prediction, escapes this predicament by diversifying environmental structure without compromising learnability.

The meta-prediction consists of two steps. It learns to predict human predictions about future outcomes (*human prediction* in Fig. 1A) and then use this ability to generate a new task design (*meta-prediction* in Fig. 1A). Importantly, this design ensures *meta-prediction* to generate task design that effectively influences *human prediction*, thereby enhancing environmental diversity without losing learnability. Our framework is generalizable in that one can generate various task designs by applying different task optimization schemes. For example, one can make a curriculum easier by having the meta-prediction minimize the human prediction error, or alternatively, make the existing task more challenging by maximizing it. Moreover, the meta-prediction allows us to diversify the dimensions of scenarios by incorporating into meta-prediction various factors, such as bias (e.g., varying the parameters of the human prediction model), type (e.g., state or reward) or profile of prediction (e.g., reducing, maintaining or increasing the amount of prediction error).

To illustrate the theoretical background, our framework was designed based on the Bellman equation, the basic mathematical framework of reward prediction. Weaved into a single learning framework are two Bellman equations, one for human prediction and the other for meta-prediction (Fig. 1B). The Bellman equation for human prediction learns to predict rewards of the environment (task) while the Bellman equation for meta-prediction learns to predict the residual of human prediction (prediction error) by changing the task variables. The role of the former is to provide full observations about latent variable changes of the human prediction process, so that the latter can effectively translate them into the task design. This completes a learning cycle of “task - human prediction - meta-prediction - an updated task”.

The learning cycle begins with individually fitted human prediction models to encode individual variability of human prediction strategies (the *specification* step in Fig. 1C). To preclude overfitting issues, these models should adopt theoretical principles from neuroscientific studies^{6–8} rather than data-driven approaches using a generic class of neural networks. The model used in this study accommodates the prefrontal control of model-based and model-free reinforcement learning⁸. Then, we train another learning agent, called a meta-prediction network, to optimize the task design by predicting human prediction error, estimated from the human prediction module (*generalization* step in Fig. 1C). The meta-prediction network was implemented with a deep reinforcement learning model^{19,20}.

Fully parameterized task space with varying predictability

To demonstrate the ability of meta-prediction, we generalize a conventional two-step Markov decision task^{7,8,10} to accommodate goal-directed learning and foraging under environmental uncertainty (Fig. 2A). Unlike conventional reward learning tasks in which reward functions remain fixed independent of subjects' choices, which inevitably impose hard constraints on the learner's prediction necessary for learning, our task parameters were crafted to provide an

environment for a wide range of predictability (Fig. 2B). They include (1) state-transition probability, which directly influences the learner's prediction about state-transition, (2) goals, which links the learner's prediction to reward, and (3) reward foraging, in which the reward changes as a function of the learner's action.

First, for the state-transition, we used a switching probability⁸ instead of a drifting probability¹⁰ because the former exerts a more dramatic impact on state prediction. The transition probability switches between 0.9 and 0.5, each simulating the condition of low and high predictability about state-transition, respectively. Second, the goal conditions were adapted from Lee et al.(2014)⁸, in which the reward is redeemable only if the goal and the color of the coin obtained at the outcome state match (goal-dependent devaluation). The goal is assigned at the beginning of each trial to facilitate reward prediction and goal-directed behavior. Lastly, we introduced reward foraging (Fig. 2C). It is our major modification to the existing two-step task paradigm. Here the learner's reward acquisition decreases reward by a certain ratio while rewards in the unvisited outcome states are gradually restored, accommodating foraging in nature. Note that this action-dependent reward function creates complex dynamics of the learner's predictions about future reward.

To summarize, each task parameter serves different purposes: foraging (action1), stable environment (action2), naturalistic foraging (action3), goal-directed learning (action4), volatile environment (action5). Since the task space comprising these parameters create a various level of predictability, it provides sufficient room for various manipulation by meta-prediction. For example, if the meta-prediction model predicted the moment the learner predicts rewards acquisition, it would determine when and how to intervene in its prediction by changing the reward function. Likewise, the meta-prediction model predicting a human's prediction about state-transition could engage in human prediction by changing the structure of the state space.

Implementation of meta-prediction networks

We trained meta-prediction networks on the task parameter space defined in the preceding section. The training process comprised two stages (illustrated in Fig. 1A): In the specification stage, the "*human prediction*" model (termed as HP model) was trained to predict the human's choice behavior. In the generalization stage, where the "*meta-prediction*" models (termed as MP models) were trained to generate new tasks, using the *human prediction* model as a reward function.

The HP model was implemented using the prefrontal arbitration model⁸ that combines model-based and model-free reinforcement learning. The models' parameters were optimized to maximally match its value function with the choice behavior of 82 individual human subjects, collected using the two-step Markov decision task^{8,21}. Model comparison and parameter recoverability analysis ensured that the model's reliability in predicting human reward learning^{8,22,23}. Importantly, the HP affords the MP the leverage to predict human prediction error, the key variable guiding human prediction.

This problem was formulated as a reinforcement learning problem, where the MP model (the learning agent) learns the HP model's prediction (the reward function). The state space of the MP model is defined as the prediction error of the HP model, and its action refers to changing

the task parameters (Fig. 2). Accordingly, a single learning cycle of the MP is illustrated as the following. The MP model's action is followed by the HP model's prediction, which is followed by the MP model's observation about the HP model's prediction error. The MP model then computes the discrepancy between predicted and actual prediction errors of the HP model (*meta-prediction error* in Fig. 1B), based on which the MP model updates its value function. The MP model was implemented using a double deep Q network.^{19,20}

To fully demonstrate the MP model's potential, we considered two distinct types of human reward prediction: model-free and model-based reinforcement learning, each of which uses reward and state prediction error, respectively. Further, to explore the full spectrum of reward prediction, we trained the MP model to extremize each type of prediction error. This resulted in four training conditions: maximizing/minimizing x reward/state prediction error (MaxR, MinR, MaxS, and MinS; see Fig. 3A). In the Max/MinR conditions, we used the absolute value of the reward prediction error. This approach serves two purposes: it allows for direct control over the level of reward prediction, and prevents MP model's policy from degenerating into HP models with either highly positive reward prediction error in the MaxR condition or highly negative in the MinR condition.

We conducted a total of 328 independent simulations, comprising 82 Human Prediction (HP) models across 4 training conditions. To mitigate potential learning biases or local minima issues in the HP models during the specification stage, we implemented a pre-training phase. This phase allowed HP models to freely explore the task environment, enabling them to fully develop internal representations of both the task structure and reward functions. In the subsequent generalization stage, MP models underwent full training while the parameters of HP models remained fixed. Despite the complexity of the training process, which involved intricate interactions between HP and MP models within each training epoch, all simulations demonstrated stable learning patterns (see Fig. 3B-K).

Tasks generated by meta-prediction

The MP models for MaxR and MinR used the foraging actions only: action 1, 2, and 3 (Fig. 2C). For maximal efficacy of MP model in controlling reward prediction error, it would be desirable for human subjects to use a model-free reinforcement learning strategy because it is the basic value learning strategy that acts on reward prediction error. To ensure this, we fixed the state-transition probability at 0.5 (highly uncertain transition) and left the goal color blank all the time (no goal condition; any types of rewards are achievable), the situations known to encourage model-free learning^{8,9,21,22,24–26}.

The simple dimension reduction of the MP model's action showed that the MP model developed distinctly different policies to control reward prediction of the HP model from a very early stage of training (Fig. 3B-(i),(ii),(iii); Cohen's *d*-score in Fig. 3B-(iv),(v)). Moreover, the learned policies reflect individual variability, as indicated by its variance increasing with training (PC variance in Fig. 3B-(iv),(v)). The meta-prediction error of the MP model converges quickly as early as 300 training episodes (Fig. 3C), effectively guiding HP model's reward prediction error in a desired manner (Fig. 3D; two-sample t-test for MinR vs. MaxR: $p=2.24e-08$).

A distinct pattern emerged in the MinR task (Fig. 3E). In the early stage, the suboptimal task favored a fixed reward function (action 2) to stabilize the HP model's learning process. Foraging (action 1) accelerated the reduction of the HP model's reward prediction error by narrowing the gap between actual reward values and the HP model's predictions. This preference of foraging (action 1) persisted throughout training. Consequently, the actions 1 serves to rapidly reduce the HP model's reward prediction error without compromising learnability. This strategy effectively deludes the HP model into perceiving its choices as correct when they were not.

The MaxR favors a fixed environment (action 2) with the most uncertain and complex reward distribution, in which state-transition is least predictable ($p=0.5$) and different reward values are assigned to different outcome states (Fig. 3F; corresponding action sequence shown in Fig. 4A-(i)). It is consistent with our intuition that uncertain and complex task structures are hard to learn.

Unlike MinR and MaxR, the models for MinS and MaxS aim to control state prediction error, a key variable for model-based learning. To meet this control requirement, the MP models employed all the actions, including the ones capable of changing foraging patterns, goals, and state-transition probabilities (action 4 and 5 in Fig. 2C). For example, when goal changes, subjects must replan their behavioral policies. When reducing uncertainty in state transitions, subjects can learn about task structures rapidly. Both situations demand model-based learning strategies. To further aid highly predictable predictions of model-based learning, the initial state-transition probability was set to 0.9.

The MP models discovered distinctly different tasks for MinS and MaxS from the very early stage of training (Fig. 3G), as indicated by rapid convergence of meta-prediction error of the MP models (Fig. 3H). As a result, it effectively guides HP model's state prediction error (Fig. 3I; two-sample t-test for MinS vs. MaxS: $p=3.60e-59$). In the MinS (Fig. 3J; corresponding action sequence shown in Fig. 4A-(ii) and Extended Data Fig. 1C), the MP model seemingly adjusts its state-transition probability to match the predictions of the HP model (action5) while mostly maintaining the goal-directed learning condition (action4) to ensure that the HP model uses the goal-directed learning strategy. In the MaxS, on the other hand, the MP model used most of the actions (action1-3) almost equally to create highly complex situations (see Fig. 3K) while holding the habitual learning condition by avoiding action 4. Here the MP model changes state-transitions to the least predictable condition (one-time action 5 to change p from 0.9 to 0.5) in the beginning of trials and keeps it all times (corresponding action sequence shown in Fig. 4A-(ii) and Extended Data Fig. 1D). The ablation analyses also confirmed the significant contribution of the MP model's key actions (action 1 for MinR, action 2 for MaxR, and action 4 and 5 for MinS and MaxS, see Extended Data Fig. 2).

Behavioral and neural effect of meta-prediction on human reward learning

While previous results demonstrate meta-prediction's ability to learn control tasks, they do not guarantee that the control effect generalizes to new human subjects. To demonstrate the general effect of meta-prediction on human subjects, we first sought to identify the most generalizable

meta-prediction model (MP model) from our simulation results (Fig. 3). We employed a MP-HP shuffle test, inspired by cross-validation in machine learning. This test evaluates each MP model's average performance across all the other HP models not used during training, estimating out-of-sample performance.

Notably, in all four training conditions (MinR, MaxR, MinS, MaxS), the shuffle test identified a subject-independent MP model that performed consistently well across all 82 HP models (Fig. 4A). These models showed statistically significant best performance in MinR, MaxR, and MinS (paired t-test $p=3.3\text{e-}10$, $2.6\text{e-}3$, and 0.03 , respectively) and near-best performance in the MaxS condition ($p=0.33$). They also exhibited distinctly different policy in each training condition (the left of each panel of Fig. 4A). The results suggest an interesting possibility: a generalizable meta-prediction policy could be developed using a relatively small set of pre-trained MP and HP models, without needing to train a new policy from a large number of subjects' data.

Using tasks generated by these subject-independent MP models, we conducted two fMRI experiments with 49 human subjects in total. In the first experiment, 26 participants performed MinR and MaxR tasks, whereas 23 participants completed MinS and MaxS tasks in the second experiment. Subjects learned the task well in all cases, as evidenced by the above-chance-level choice optimality (Fig. 4B,C-(i)). The choice optimality was defined as the proportion of a subject's choice that matches those of an optimal model-based reinforcement learning algorithm with complete task information, including reward function and state-transition probability.

In the first experiment, we expected that the MaxR condition would yield higher choice optimality than the MinR condition. It is based on the assumption that subjects in the MaxR condition would need to exert greater effort to learn tasks, providing necessary motivation if the task is learnable. Our results confirmed this prediction (Fig. 4B-(i)). Moreover, these findings ruled out the alternative explanation that such meta-control simply adjusts the task difficulty. If this were the case, we would have expected to see choice optimality increase from MinR and MaxR. In the model-based behavioral analysis to estimate reward prediction error by fitting model-free reinforcement learning algorithms to individual subjects choice behavior, we confirmed that meta-control effectively extremized human reward prediction error (MaxR > MinR in Fig. 4B-(ii)).

In the second experiment, we predicted that the MaxS condition would yield higher choice optimality than the MinS condition because maximizing state prediction error in MaxS directly hinders learning about the task structure. Our results corroborated this view (Fig. 4C-(i)). Moreover, the model-based behavioral analysis to estimate state prediction error using model-based reinforcement learning algorithms confirmed that meta-control effectively extremized human state prediction error (MinS < MaxS in Fig. 4C-(ii)).

Subsequent model-based fMRI analyses (see Method) demonstrated the neural effect of meta-prediction. First, we replicated the previous findings^{2,7,8} that the reward prediction error was reflected in the activity patterns of the nucleus accumbens (Fig. 4D-(i)). State prediction error was encoded in the neural activity of multiple cortical areas, including dorsolateral prefrontal cortex, insula, and intraparietal sulcus (Fig. 4D-(ii),(iii),(iv)), fully consistent with the previous studies^{7,8}. All effects are significant after statistical correction. Critically, we confirmed the

neural effect of meta-control in these areas. The neural activity change was significantly greater in MaxR/MaxS compared to MinR/MinS (Percent signal change plots in the bottom of Fig. 4D). In conclusion, we demonstrated the effect of meta-prediction at both behavioral and neural levels in experiments with human subjects who did not participate in the initial experiment to build HP or MP models.

Meta-prediction unveils individual goal-habit bias

Building on evidence that the meta-prediction could generate tasks to extremize learning agent's state and reward predictions at both behavioral and neural levels, we hypothesized that under such extreme circumstances, the agents would reveal innate reward learning biases. These biases are characterized by the balance between goal-directed or habitual learning systems^{3,11,27–32}. This goal-habit balance is crucial, as its break-down has been implicated in psychiatric disorders such as addiction or obsessive compulsive disorder^{33–39}. We ran computer simulations to explore the possibility of training meta-prediction (MP) models to reveal the goal-habit bias of human-prediction (HP) models. Note that the HP models used in our simulation were previously fitted to data from 82 human subjects, thus serving as proxies for individual human reward learning.

Specifically, MP models for estimating the goal-habit balance were trained to control HP model's "long-term" prediction errors -that is, reward and state prediction error over multiple trials- rather than the immediate prediction errors used in our previous settings (MinR, MaxR, MinS, MaxS). This approach was based on the earlier findings showing that the long-term prediction error signal is the key variable to maintaining a goal-habit balance^{8,21,40,41} (Fig. 5A).

Among four possible training conditions (long-term MinR, MaxR, MinS, MaxS), we found that the long-term MaxS effectively disrupts the goal-habit balance by taxing goal-directed learning (Fig. 5A-(ii), see Extended Data Fig. 4), the strategy known to be favored by humans in the early stage of. As an extension, we implemented MP models with a more nuanced training condition, long-term MaxS+MinR, which serves to shift the bias from goal-directed to habit systems more rapidly (A direct implementation of the case (iii) of Fig. 5A).

The MP model-HP model shuffle test conducted after training revealed two distinct clusters in terms of MP performance (labeled c1 and c2 in Fig. 5B,C-(i), detailed clustering results in Extended Data Fig. 5). This finding suggests the existence of two groups of MPs and HPs. Within each group, the MPs can effectively extremize the long-term prediction errors of one set of HP models, but not the other. This distinction suggests that the cluster-based MP models can be used to classify HPs in the system. These cluster-based MP models outperformed the subject-independent MP models, which showed the best average performance across all HP models (Fig. 5B,C-(ii)). These MP model's actions are also found in more complex scenarios such as long-term MaxS+MaxR and long-term MaxS+MinR (see Extended Data Fig. 3E,H), implying that potentially highly complex tasks can be designed in a compositional manner with less amount of training (Additional analyses shown in Extended Data Fig. 7).

Motivated by the above findings, we evaluated how these clusters (c1 and c2) unveil HP models' goal-habit bias. Note that the two clusters were found without any information about HP models. The associated tasks are distinctly different (Fig. 5D,E-(i)). Critically, we found

that the two clusters predict the goal-habit bias (Fig. 5D,E-(ii)), as well as the key parameter determining long-term prediction error (Fig. 5D,E-(iii)). The goal-habit bias of HP models were defined as the extent to which a model-based reinforcement learning algorithm explains human subject behavior compared to a model-free approach, measured in terms of likelihood values. Additionally, we found substantial overlap among the clusters from different scenarios (Extended Data Fig. 6), demonstrating the flexibility of meta-prediction in various learning.

In conclusion, these simulation results demonstrate that meta-prediction, particularly task performance-based classification using cluster-based MP models, can effectively discern the reward learning bias of human subjects. This approach offers a novel and efficient method for understanding individual differences in learning strategies without requiring behavioral analyses or model-fitting^{8,10,21,22}.

Discussion

Our study demonstrates the potential for deep learning models to comprehend the complex dynamics underlying human reward learning through meta-prediction error. Unlike traditional data-driven approaches that merely mimic human behavior, our method focuses on human prediction error—the key variable in reward learning. This approach significantly enhances interpretability in two crucial ways. Firstly, by tracking the estimated value of Human Prediction (HP) models, one can interpret human predictions at each moment. Secondly, by analyzing the tasks generated by Meta-Prediction (MP) models, one can illustrate when and how humans make predictions. This framework provides more direct and clearer insights into human reward learning processes compared to other behavioral and neural analyses, such as representational similarity analysis, which often yield inconsistent results across tasks and methodologies⁴².

Previous research has demonstrated the potential of using computational cognitive models to generate tasks that influence human decision-making or expedite learning^{16,17}. However, these approaches have been limited in scalability and applicability due to their reliance on simple task parameter settings and nearly identical task spaces. Our framework addresses this limitation through a novel approach: the Meta-Prediction (MP) model generates or optimizes parameterized tasks, while the Human Prediction (HP) model provides predictions within these tasks. We have demonstrated that MP models successfully generate tasks across various training conditions, even when their task space differs from that of the HP models. Future work could benefit from our HP-MP model by generalizing it to an encoder-decoder architecture, with HP models serving as encoders and MP models as decoders. This architecture is interpretable, as the encoder provides a direct estimation of human prediction error, while the decoder offers interpretation at the task level. This scalable, generalizable, and interpretable framework offers unified insights into human behavior prediction and associated task generation.

Our meta-prediction framework has wide-ranging applications across various fields of study. First, it enhances curriculum learning^{43,44} by exploring different levels of task complexity without compromising learnability. In decision neuroscience, it helps fine-tune existing task structures for better dissociation between state and reward prediction errors. In smart education, it can enhance learning efficiency while accommodating individual variability⁴⁵. Additionally,

our framework can guide the diagnosis and treatment of mental disorders. By leveraging models of abnormal behavior distributions in various conditions, the meta-prediction module could generate tailored tasks to facilitate diagnosis or intervene in the latent processes for cognitive behavior therapy. Finally, our meta-prediction theory offers a fundamental solution to value alignment between humans and AI models. Training a meta-prediction module to minimize prediction error can be viewed as the process of aligning the value function of human subjects with that of an arbitrary AI model. For instance, a meta-prediction module trained to predict human value function could guide reinforcement learning with human feedback (RLHF) for large language models.

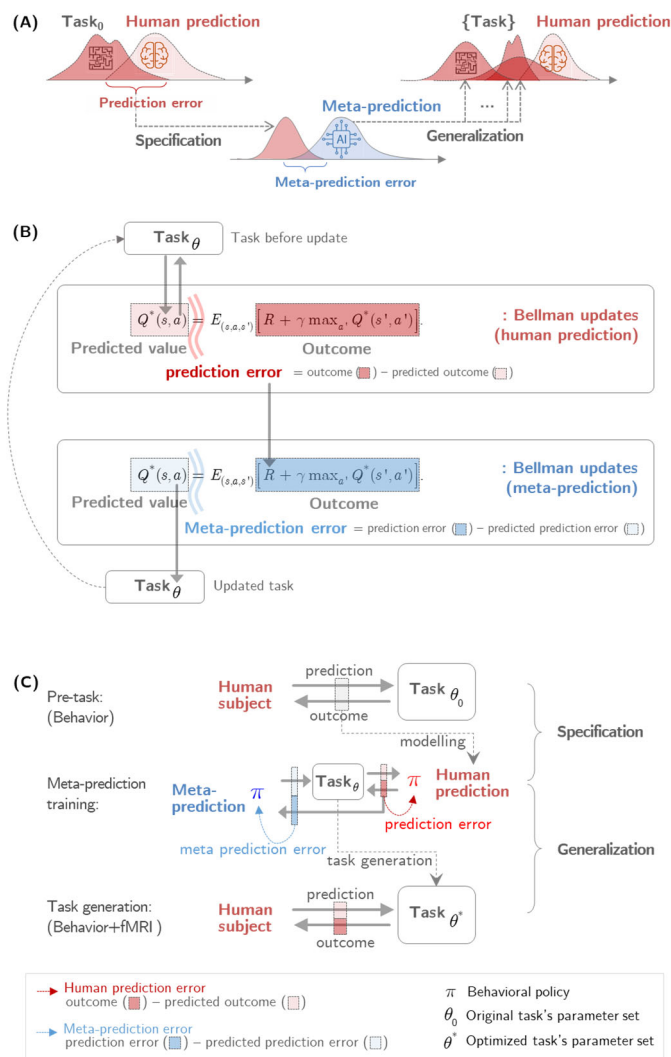


Fig 1. Meta-prediction. (A) Meta-prediction problem. (Left) In an uncertain value-learning environment, human prediction (HP) aims to learn the probability distribution of the task's reward or structure by minimizing the mismatch between the estimated and true distribution called prediction error. (Middle) Meta-prediction (MP) aims to learn the distribution of individual HP errors from the task interaction (*specification*). (Right) Once learning is completed, meta-prediction can generate the task by changing the task variables to guide HP (*generalization*). (B) Formulating the MP problem as a coupled Bellman equation. MP consists of the two-stage predictions, each specified as a separate Bellman equation. The red and blue correspond to HP and MP, respectively. MP's reward function is defined as the prediction error of the HP. The MP's state space is defined as the task variable and the HP's prediction error. The MP's actions are defined as a set of changes of the environment/task parameters. The MP's prediction error is defined as the difference between the expected and the actual prediction error of the HP model ("meta-prediction error"). The MP problem can be solved using reinforcement learning (RL) algorithms. (C) The whole process comprises three steps: pre-task for data acquisition, HP model fitting, and MP model training. First, a human behavior dataset was acquired using a two-step goal-directed learning task. Second, HP models were fitted to imitate the individual subject's behavior ("specification"). Third, another RL model was trained to change the task parameters so as to guide the key variables of the HP model. Note that the MP is applicable to any parameterized task and can generate various types of tasks ("generalization").

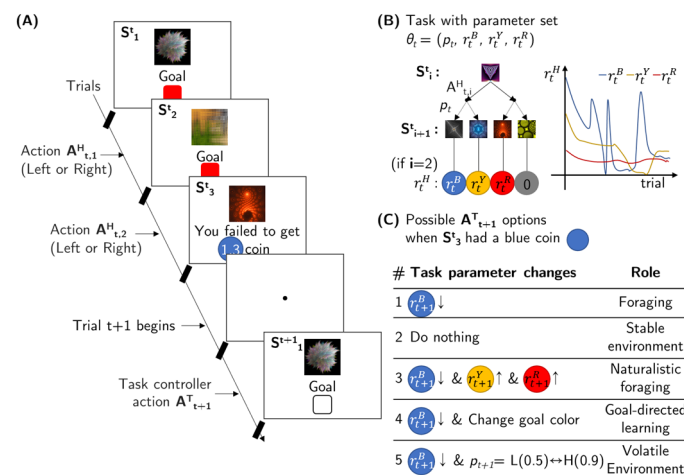


Figure 2. Parameterized reward learning task. (A) Markov decision task for goal-directed learning and foraging. This task accommodates goal-directed learning and foraging under environmental uncertainty. The learner, either a human subject or a human prediction model, makes two consecutive choices to collect coins of different colors. In each trial, subjects are presented with one of the three goals indicated by different colors. They are asked to collect a coin available at the outcome state. Each outcome state contains a coin of a specific color, associated with a different reward amount. Coins are redeemable only when the current goal color matches the coin color, enforcing goal-directed learning. If the goal color is blank, all coins are redeemable, making the task equivalent to conventional reward learning. To reach the desired outcome state, subjects must learn to navigate the state-space whose structure is determined by state-transition probabilities. The fractal image and a box represent a state and goal, respectively. (B) The structure of the task. (Left) The task parameters (θ_t) consist of the state transition probability (p_t) and the reward associated with different coin colors (r_t). (Right) The reward amount may change over time. (C) The meta-prediction model's actions are defined on the task parameter space. For example, actions simulate a foraging condition in various ways: each time the agent visits an outcome state associated with a blue coin, the corresponding reward amount decreases (action #1, #3, #4, and #5) while the other rewards of unvisited outcome states are gradually restored (action #3). The action #4 and #5 changes the goals and the level of uncertainty of the task.


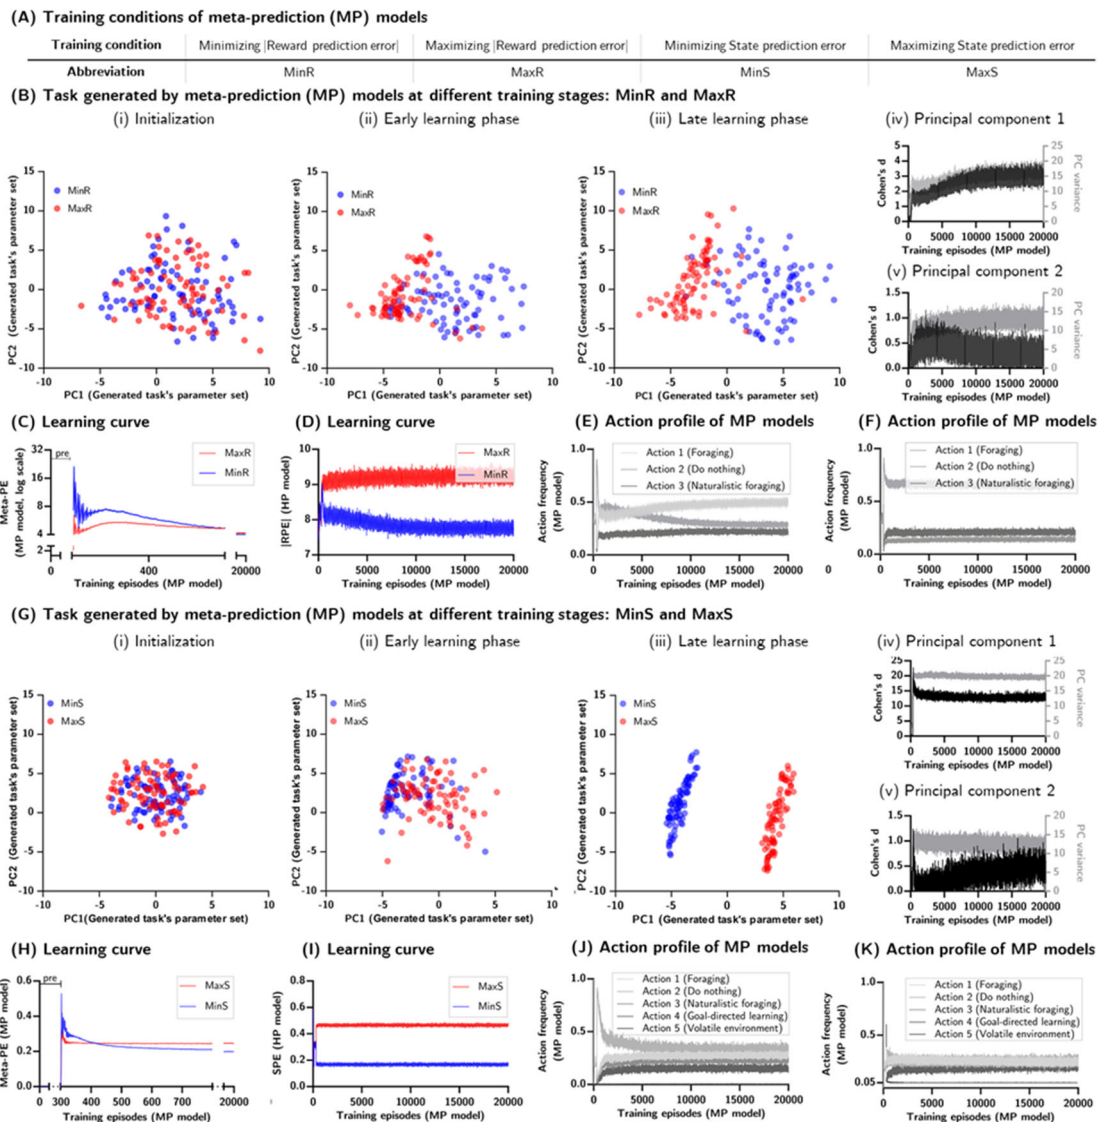



Fig 3. Training meta-prediction models. (A) Four training conditions of meta-prediction. The meta-prediction (MP) models were trained to minimize/maximize reward/state prediction error: MinR, MaxR, MinS, MaxS. (B) Tasks generated by MP models at the initialization, early, and late training stages (MinR and MaxR). The dimension reduction analyses (PCA) summarize how MP models learn to control each task parameters in two opposite training conditions. Throughout training, tasks gradually accommodate not only different training objectives (as indicated by the separability measure in (iv); Cohen's d) but also individual variability (as indicated by the variance measure in (iv); variance). (C) Learning curve of the MP model's meta-prediction error. (D) Changes of the HP model's reward prediction error during training. (E-F) Action profile of MP models. Shown are the changes of the MP model's action frequency, i.e., how many times the MP model changed task structures. (G-K) The same analyses as (C-F), except for MinS and MaxS.

(A) Subject-independent meta-prediction (MP) models

(i) MP models for extremizing reward prediction error (RPE)

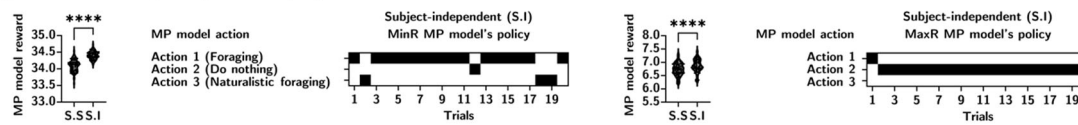


(ii) MP models for extremizing state prediction error (SPE)

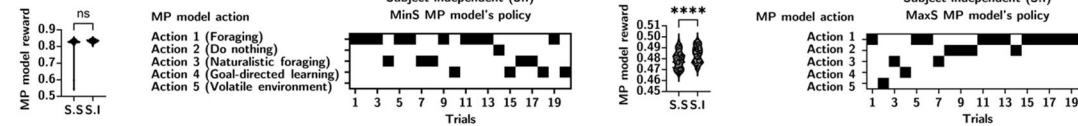


■: Action performed by the MP model, S.S: Subject-specific MP models, S.I: Subject-independent MP model, ns: non-significant, ****: $p < 0.0001$

(B) Behavioral evidence of meta-prediction (extremizing reward prediction error)

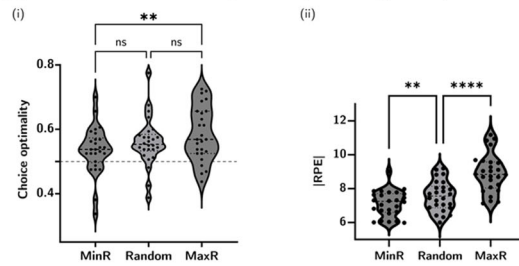

(C) Behavioral evidence of meta-prediction (extremizing state prediction error)

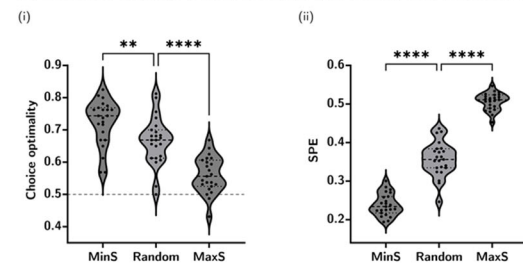

(D) Neural evidence of meta-prediction

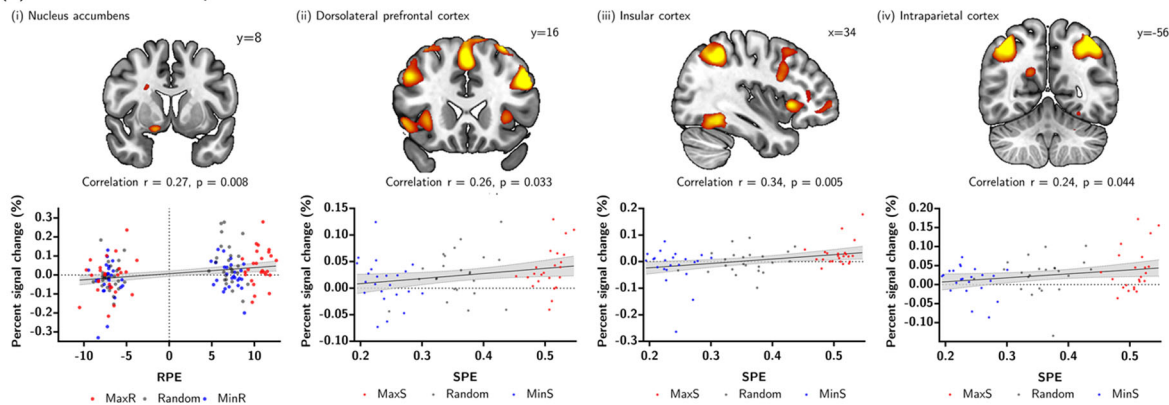


Fig 4. Behavioral and neural effects of meta-prediction. (A) Performance of subject-independent meta-prediction was evaluated in four different conditions: (i) MinR and MaxR, (ii) MinS, MaxS. Shown on the right of each condition is the performance (meta-prediction reward) of the Meta-prediction (MP) - Human prediction (HP) shuffle test, where each MP model trained on a specific subject was applied to other subjects. S.S refers to subject-specific MP, in which each MP model was trained with each HP model. S.I. refers to subject-independent MP, a single MP model that shows the best average performance across all the HP models. The action sequences of the S.I. MP models are shown on the left of each performance plot; a black box refers to the action taken by the MP model. We used S.I. MP for the rest of the analyses. (B) Behavioral effect of meta-prediction for reward prediction (MinR and MaxR). The behavioral analyses include (i) the optimality of individual subject's choice and (ii) the reward prediction error estimated from the model-free RLs, which were fitted to each subject's choice behavior. (C) Behavioral effect of meta-prediction for state-transition prediction (MinS and MaxS). The behavioral analyses include (i) the optimality of individual subject's choice and (ii) the state prediction error estimated from the model-based RLs, which were fitted to each subject's choice behavior. (D) Neural effect of meta-prediction. Activities in the ventral striatum^{2,7,8} correlated with reward prediction errors (RPEs) (i), while activities in the lateral prefrontal cortex^{7,8}(ii), insula⁸(iii) and intraparietal sulcus^{7,8} (iv) correlated with state prediction errors (SPEs). The percent signal change analysis was performed on 5mm radius. Error bars represented SEM across subjects. Asterisks (*) indicate significance levels: * $p < 0.05$, ** $p < 0.01$, *** $p < 0.001$ (paired t-test).

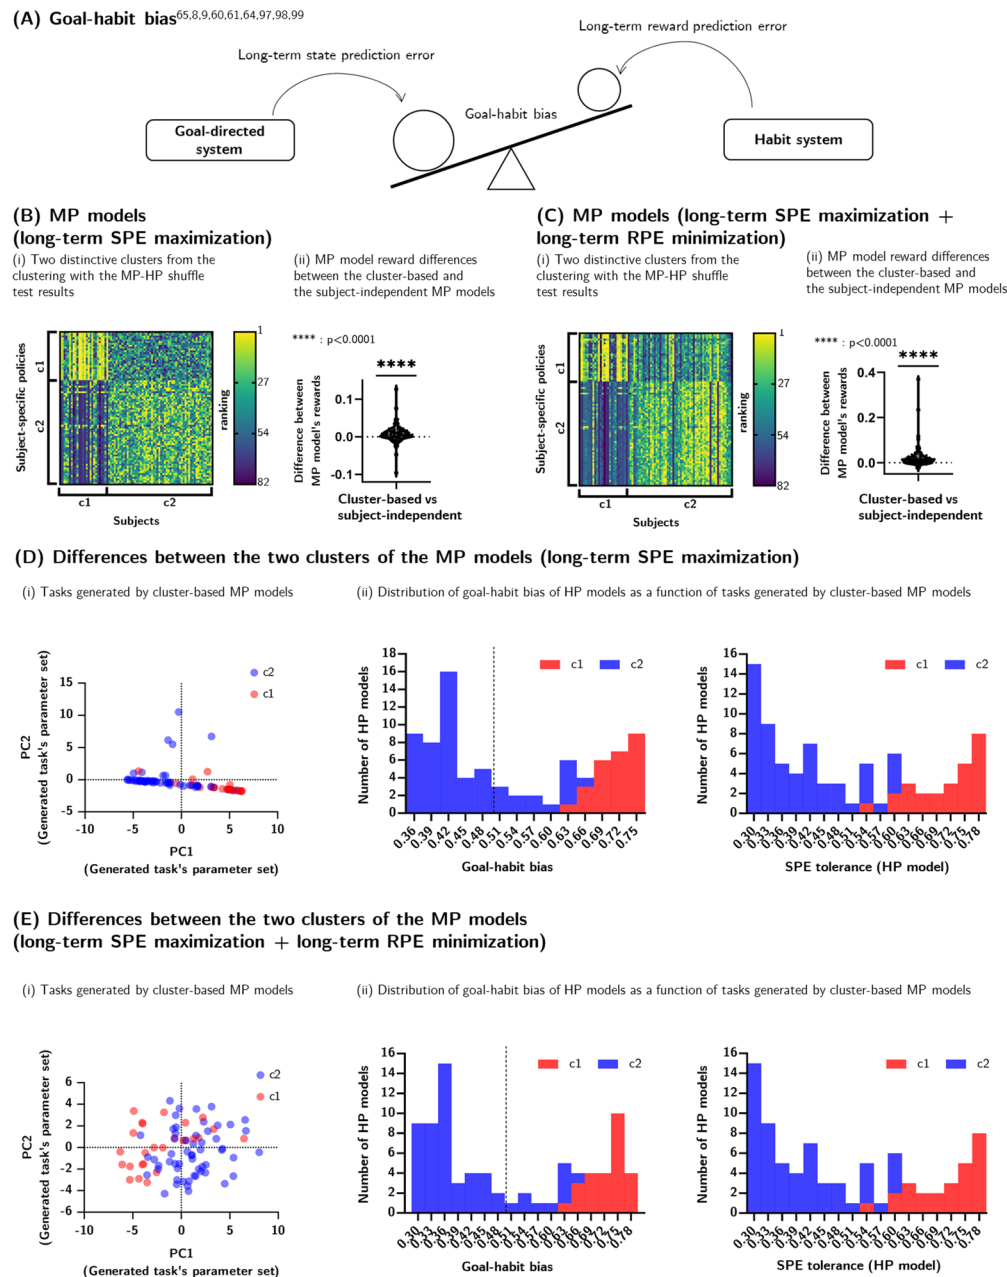


Fig 5. Individual goal-habit bias classification with meta-prediction. (A) Effect of long-term prediction error (PE) on goal-directed RL (adopted from Yoshida et al.(2014)⁴⁰). Earlier works showed that the reward/state PE (RPE/SPE) over multiple trials (long-term PE) is the key variable to explain bias towards two different reward learning strategies: goal-directed and habitual learning^{8,21,40,41}. This view suggests that MP to control long-term PE could decode the goal-habit bias. (B) MP models were trained for long-term SPE maximization. (i) MP-HP shuffle test. We trained MP models for long-term SPE maximization (long-term MaxS). Shown are the rewards of MP models for each HP model. Two clusters were found, as indicated by c1 and c2. (ii) In terms of MP model rewards, the cluster-based MP models are better than a single model that showed best performance averaged across all the HP models (Wilcoxon test; $p < 1e-4$). (C) MP models were trained for long-term SPE maximization + long-term RPE minimization (dual objective long-term MaxS + MinR). (D) (i) Tasks generated by MP models for long-term SPE maximization (dimension reduction analyses). Two different types of MP model-generated tasks were indicated by red (c1) and blue (c2) clusters. c1 and c2 were labeled from the (B). (ii) Distribution of goal-habit bias (left) and SPE tolerance (right) of HP models were color-coded by the two clusters found in (C). The goal-habit bias was measured as an innate preference to habitual RL (w in Daw et al.(2011)¹⁰; P_{mb} in Lee et

al.(2014)⁸). The SPE tolerance is the key parameter to reflect the sensitivity to its own PE⁸. (E) The same analyses as (D), except for MP models for long-term SPE maximization + long-term RPE minimization. c1 and c2 were labeled from the (C).

Method

General Stimuli

We used fractal images to represent the initial state, four intermediate states following the player's first action, and four terminal states associated with rewards. Each subject observed nine fractal images randomly selected from a set of 126 images at the beginning of the task. A square box was displayed beneath the state image to indicate the target goal color (red, blue, yellow, or white). In the terminal state (i.e., the final phase of each trial), a state-associated coin (red, blue, yellow, or gray) and its value appeared below the target goal color image. Coin acquisition depended on matching the target goal color, which was displayed alongside the coin value. The gray coin consistently had a reward value of zero throughout the task, while the values of the other colored coins were determined at the start of each experiment. The ranking and cumulative scores were presented below the coin value to maintain participant engagement.

General Tasks

The experimental setup for fitting the human prediction model was adapted from previous two-stage Markov decision tasks^{7,8}. We then modified this set up for meta-prediction model training and its application to novel human subjects. The basic structure of the experiment was the same for both simulation and real-human subject tasks. Participants pressed one of two buttons ('Right' or 'Left') based on the current state image and goal color. If no choice was made within 4 seconds of the state image presentation, the computer randomly selected an action to continue the task. The next state appeared between one and four seconds after the action. Following the final state and reward presentation, a new game began two seconds later, starting with the same initial state image.

Each action led participants to one of two possible next states based on state transition probabilities that the participants had to infer implicitly. The meta-prediction model assigned the state transition probabilities of either [0.5, 0.5] or [0.9, 0.1]. The state-action-reward mapping remained constant for each participant across all sessions. Participants learned this mapping and inferred the current state transition probabilities during a pre-training session, which was not included in performance evaluation. The participants then applied their knowledge during five main sessions. Each session consisted of 80 game trials, organized into four blocks of 20 trials.

Prior to the pre-training session, participants were instructed about potential changes in state transition probabilities and the implication of the goal color image. However, they were not informed of the specific values of the colored coins or the exact state images they would encounter. The colored coins, except for gray, represented 'high,' 'medium,' and 'low' reward values – initialized at 40, 20, and 10 rewards, respectively – and these values remained fixed as upper boundaries throughout the task. During simulation, rewards for non-target goal coins were deactivated and hidden under specific goal conditions, until reactivation by the meta-prediction models.

At the start of each game, participants could identify the current goal-color from the displayed goal-color indicating images. In the flexible goal condition (white box), participants could obtain coins at terminal states regardless of color. In the specific goal condition (red, yellow, or blue), coin acquisition was restricted to the trials where the coin color matched the target goal color. These rules were explained to the participants before the pre-training session.

We integrated foraging paradigms into the conventional two-stage Markov Decision Task to incentivize explorative behaviors and mitigate habitual decision-making strategies. The initial value of the coins was set as the upper boundary threshold, with reward values below two decimal points systematically eliminated. To promote foraging behavior and discourage habitual actions, the value of the acquired reward coin was devalued by 65%-85%.

Each block of tasks was administered according to either (i) the task environments generated by the meta-prediction model or (ii) a pseudo-random policy where action selections followed stochastic distribution with controlled frequencies to maintain outcome equilibrium. After completing each block, participants were asked to rate task difficulty on a 5-point scale. This subjective rating, however, was not incorporated into the meta-prediction model.

Human prediction models (HP models)

We used the same arbitration model of reinforcement learning (RL) described in the previous paper⁸. The model consisted of three primary components: a model-free learner, a model-based learner, and an arbitrator.

The model-free learner utilized the SARSA algorithm¹, a standard approach in RL. The model-based learner employed forward learning⁷ for state transition updates and backward planning to address predictable changes in task structures. Both learners generated distinct prediction errors following each action: the model-free learner produced reward prediction error (RPE), while model-based learner generated state prediction error (SPE). The arbitrator evaluated each learner's reliability based on the history of prediction errors and modulated their relative contributions through a dynamic equilibrium mechanism⁸. Furthermore, the arbitrator computed the integrated Q-action values from both learners and selected actions via the soft-max function^{7,46}.

The HP models were trained on behavioral data collected from 82 participants across two experiments: 22 adults (6 females, mean age 28, age range 19-40) from the USA and 60 adults (31 females, mean age 22.75, age range 19-35) from South Korea. The same two-stage Markov decision task, excluding the foraging condition, was used for both experiments. The both studies received ethical approval from their respective Institutional Review Boards – Caltech for the U.S. experiment and KAIST for the South Korean experiment.

Meta-prediction model (MP models)

The MP models chose one from five distinct, pre-defined options (see Figure 2C). The first three options were available to both SPE and RPE control, which focused on restoring or maintaining the value of the devalued coins : (i) *Foraging* – kept the task structure unchanged after reward devaluation, (ii) *Do Nothing* – targeted previously devalued coins of the same color, and (iii) *Naturalistic foraging* – targeted coins of the different colors other than those previously devalued. These three options above increased the targeted coin values by multipliers between 1.18 and 1.54, with values capped at a predetermined maximum. Next, the additional two options were exclusive to SPE control: (4) *Goal-directed learning* – alternated between specific goals (which randomly selected colors at the beginning of each game) and flexible goals, and (5) *Volatile environment* – modified the state transition probabilities between (0.9, 0.1) and (0.5, 0.5).

We implemented the MP models using the double-DQN algorithm^{19,20}. The MP models featured a fully connected architecture with a single hidden layer containing 64 neurons. The input vector consisted of 20 dimensions: 16 dimensions for the rewards at terminal states, two dimensions for transition probability, and two dimensions representing SPE and RPE values for the current agent. The action selection of the MP models was guided by an epsilon-greedy policy (epsilon = 0.1) to ensure a balance between exploration and exploitation. The models were trained using the RMSprop algorithm⁴⁷ with mean squared error as a loss function. The replay buffer had a capacity of 4500 samples. The training was conducted with a batch size of 32. Each MP model was trained for 20,000 episodes, which included a pre-training phase.

Training the individual MP models

We implemented the pre-training stage for both the HP and MP models to replicate the experimental setting of the original human subject experiments. During the first 100 episodes, the HP models explored the default foraging task by performing random actions. For the MP models, we first detached them from the task for the initial 25 episodes out of 100 episodes. Afterwards, we had them perform random actions for the remaining 75 episodes to explore their action space.

Analysis on behavioral dynamics of tasks generated by MP models during training

In relation to Figure 2B, we conducted the comprehensive analysis on behavioral characteristics of tasks generated by the MP models, focusing on their dynamics across the initialization, early, and late training stages. We achieved it by systematically evaluating task parameters at each stage of training.

First, we captured snapshots of the tasks generated by the MP models during each training episode. Each snapshot consisted of a sequence of trials within the episode and the corresponding task parameters – transition probability and coin reward values – manipulated by the MP model.

Next, we categorized the collection of snapshots into two distinct groups after vectorizing the tasks. Each task was encoded as a vector, with episodes comprising 20 trials represented by 80-dimensional vectors (20 trials $\times$ 4 features: one feature for transition probability and three for coin rewards). These vectors were grouped into two categories based on the MP model's target prediction errors.

We then performed principal component analysis (PCA) on the tasks in each group, extracting the two principal components with the highest variance. Finally, we calculated Cohen's distance⁴⁸ between these components, aligning the measurement with the direction of the MP model's prediction error control.

Ablation study to evaluate the contribution of MP model's key action

To highlight the significance of the MP model's key action, we conducted a systematic ablation study by strategically reducing the action space while preserving the consistent experimental setup for the MP models' training. In these control tasks, MP models incorporating SPE were limited to four actions (i.e., one action was removed from the original five), whereas those employing RPE were restricted to two actions (i.e., one action was removed from the original three). Importantly, all other experimental settings remained identical to the original MP model training framework, ensuring a controlled comparison. This approach enabled us to examine the sensitivity of the models to changes in action space and to assess their controllability across varying control task objectives (e.g., MinR, MaxR, MinS, MaxS).

Acquisition of the generalized MP models

We systematically collected subject-specific task environments generated by trained MP models, each of which corresponded to a distinct HP model. A comprehensive set of 82 task environments was generated for each MP model objective. These meticulously constructed task environments were subsequently applied across all HP models, resulting in 82×82 sets of behavioral data, wherein HP models responded to the task environments generated by the MP models. For each HP-MP pair, we conducted a simulation of 100 episodes and computed the average reward achieved by the MP model across these episodes.

The MP model that generated the task environment demonstrating the highest average reward across all HP models was identified as the subject-independent MP model. To rigorously assess performance, we conducted a paired *t*-test to statistically compare the rewards obtained by the subject-independent MP model against those generated by individual HP model-specific MP models.

Participants

A total of 26 right-handed volunteers (15 females, mean age 22.5, age range 19-35) participated in the RPE control task, while 23 right-handed volunteers (9 females, mean age 24, age range 19-31) took part in the SPE control task, both of which included fMRI scanning. Participants were pre-screened to exclude individuals with a history of neurological or psychiatric illnesses. All participants provided informed consent, and the study was approved by the KAIST Institutional Review Board.

Behavioral measure

Choice optimality We assessed the choice optimality of individual participants to determine whether they had correctly learned the task structure and adapted their behavior across different task blocks. Choice optimality was defined as the ratio of optimal actions to the total number of actions taken. An optimal action was identified as the

one with the highest expected value, given full knowledge of the coin values and state transition probabilities.

Reaction time We analyzed the effect of task control conditions on reaction time (RT) in both RPE and SPE control tasks. In both conditions, there were no significant differences between RT values. (RT MinR = 0.68s; RT MaxR = 0.71s, RT MinR vs MaxR paired *t*-test; *p*=0.174; RT minS = 0.72s; RT maxR = 0.74s, RT MinR vs MaxR paired *t*-test; *p*=0.58)

fMRI data acquisition

Functional imaging for the RPE task was conducted using a 3T Philips Achieva scanner located at the Korea Basic Science Institute (KBSI), while the SPE task was performed on a 3T Siemens Verio scanner located at the KAIST fMRI center. Both scanners used 32-channel radio frequency coils. High-resolution structural images were acquired using MPAGE sequences, with a resolution of 1.2 mm × 1.2 mm × 1.2 mm for the RPE task and 1 mm × 1 mm × 1 mm for the SPE task.

Functional scans were acquired using a one-shot echo-planar imaging sequence (RPE: TR = 2500 ms; TE = 35 ms; FOV = 100 mm; flip angle = 79°; SPE: TR = 2500 ms; TE = 30 ms; FOV = 100 mm; flip angle = 90°). Both tasks acquired 45 slices, with voxel resolutions of 3.5 mm × 3.5 mm × 3.5 mm for the RPE task and 3 mm × 3 mm × 3 mm for the SPE task.

fMRI Data analysis

We analyzed the fMRI data using the SPM12 software package (Wellcome Department of Imaging Neuroscience, Institute of Neurology, London). Slice-timing correction was applied to the functional images to address differences in acquisition times across individual slices within each scan. The images were then motion-corrected, spatially normalized to a standard echo-planar imaging template to account for anatomical variability between participants, and smoothed using a 3D Gaussian kernel with an 8 mm full width at half maximum (FWHM). The processed dataset was subsequently subjected to statistical analysis.

GLM analysis

We employed a General Linear Model (GLM) to perform whole-brain analyses of human decision-making processes. The model included regressors for stimulus onsets (R1), parametric regressors encoding target prediction errors (R2-RPE or SPE) at the same time points, and the movement-related regressors (R3-R8). For each GLM run at the single-subject level, orthogonalization of the regressors was disabled to preserve the correlated information between SPE and RPE. A whole-brain FWE correction (*p* < 0.05) was applied to account for multiple comparisons. A high-pass filter (cutoff = 129 s) was used to remove low-frequency noise from the data.

Percent signal change analyses

We selected spherical regions of interest (ROIs) based on the GLM results to examine prediction errors. The SPE ROIs were defined as 20 mm radius spheres centered at (30, -56, 44), (48, 16, 46), and (34, 22, 0) for the intraparietal sulcus, dorsolateral prefrontal cortex, and insular cortex, respectively. The RPE ROI was defined as a 5 mm radius sphere centered at (-14, 8, -12) for the nucleus accumbens. All brain coordinates were based on MNI coordinates. The difference in sphere radius was chosen based on the varying sizes of the relevant brain regions.

We performed a percent signal change analysis using the rfxplot toolbox (<http://rfxplot.sourceforge.net/>) to investigate prediction error onsets across different MP model objectives (minimizing, maximizing, and pseudo-random). Due to the relatively slow block frequency (20 trials per block ≈ 15 minutes per block), we applied a high-pass filter with a cutoff of 9999 seconds during the 1st level GLM analysis prior to conducting the percent signal change analysis.

HP-MP model shuffle analysis

After acquisition of the HP model-specific MP models for controlling long-term prediction errors, we assessed the controller reward ranking for each MP model within each HP model. Each MP model was assigned an 82-length vector representing its ranking across specific HP models. We performed hierarchical clustering based on the Euclidean distance between the controller reward ranking vectors.

Task environments that did not involve maximizing long-term state prediction errors showed no clear separations (Extended Data Fig. 5-A,B,D,F,G). In contrast, three task conditions that involved maximizing long-term state prediction errors exhibited similar cluster separations (Extended Data Fig. 5-C,E,H), differing by only about 2-3 subjects (Extended Data Fig. 6).

For further cluster analysis, we selected clusters that maximized long-term state prediction errors + minimized long-term reward prediction errors. The same method used for prediction error analysis was applied to the principal component analysis of the task environments.

Data availability

The raw behavioral data and fMRI results are available for download at https://github.com/brain-machine-intelligence/meta_prediction_2024.

Code availability

The simulation codes are also available for download at https://github.com/brain-machine-intelligence/meta_prediction_2024.

Acknowledgements

This work was funded by the National Research Foundation of Korea(NRF) grant funded by the Korea government(MSIT).(RS-2024-00341805), Institute of Information & communications Technology Planning & Evaluation (IITP) grant funded by the Korea government (MSIT) (No. RS-2023-00233251, System3 reinforcement learning with high-level brain functions), the National Research Foundation of Korea(NRF) funded by the Korean government (MSIT) (No. RS-2024-00439903), Institute for Information & communications Technology Promotion(IITP) grant funded by the Korea government(MSIT)(No.RS-2019-II190075 Artificial Intelligence Graduate School Program(KAIST), Electronics and Telecommunications Research Institute(ETRI) grant funded by the Korean government (24ZS1100, Core Technology Research for Self-Improving Integrated Artificial Intelligence System), and Electronics and Telecommunications Research Institute(ETRI) grant funded by the Korean government [N01230878, Development of Beyond X-verse Core Technology for Hyper-realistic interactions by Synchronizing the Real World and Virtual Space].

Author contributions

S.W.L., J.H.L and J.S. conceived and designed the study. J.S. implemented the behavioral task and ran the fMRI study. J.H.L implemented the initial task controller and the simulation framework. J.S. designed computational models and analyzed the data. S.W.L and J.S. wrote the paper. S.W.L, J.H.L and J.S. reviewed, revised and edited the paper. All authors approved the final version for submission.

Competing interests

The authors declare no competing interests.

Additional information

Supplementary information is available for this paper.

Correspondence and requests for materials should be addressed to S.W.L.

-References

1. Schultz, W. Predictive reward signal of dopamine neurons. *J. Neurophysiol.* **80**, 1–27 (1998).
2. Wunderlich, K., Dayan, P. & Dolan, R. J. Mapping value based planning and extensively trained choice in the human brain. *Nat. Neurosci.* **15**, 786–791 (2012).
3. Tricomi, E., Balleine, B. W. & O’Doherty, J. P. A specific role for posterior dorsolateral striatum in human habit learning. *Eur. J. Neurosci.* **29**, 2225–2232 (2009).
4. Ikemoto, S. & Panksepp, J. The role of nucleus accumbens dopamine in motivated behavior: a unifying interpretation with special reference to reward-seeking. *Brain Res. Rev.* **31**, 6–41 (1999).
5. Tolman, E. C. Cognitive maps in rats and men. *Psychol. Rev.* **55**, 189–208 (1948).
6. O’Doherty, J. P., Dayan, P., Friston, K., Critchley, H. & Dolan, R. J. Temporal Difference Models and Reward-Related Learning in the Human Brain V(t UCS) and V(t UCS 1) generates a positive prediction error that, in the simplest form of TD learning, is used to increment the value at time t UCS-1 (in proportion to. *Neuron* **28**, 329–337 (2003).
7. Gläscher, J., Daw, N., Dayan, P. & O’Doherty, J. P. States versus rewards: Dissociable neural prediction error signals underlying model-based and model-free reinforcement learning. *Neuron* **66**, 585–595 (2010).
8. Lee, S. W., Shimojo, S. & O’Doherty, J. P. Neural Computations Underlying Arbitration between Model-Based and Model-free Learning. (2014) doi:10.1016/j.neuron.2013.11.028.
9. Daw, N. D., Niv, Y. & Dayan, P. Uncertainty-based competition between prefrontal and dorsolateral striatal systems for behavioral control. **8**, (2005).
10. Daw, N. D., Gershman, S. J., Seymour, B., Dayan, P. & Dolan, R. J. Model-based influences on humans’ choices and striatal prediction errors. *Neuron* **69**, 1204–1215 (2011).
11. Balleine, B. W. & O’Doherty, J. P. Human and Rodent Homologies in Action Control: Corticostriatal Determinants of Goal-Directed and Habitual Action. *Neuropsychopharmacol.* **35**, 48–69 (2009).

12. Dayan, P. & Daw, N. D. Decision theory, reinforcement learning, and the brain. *Cogn. Affect. Behav. Neurosci.* **8**, 429–453 (2008).
13. Momennejad, I. *et al.* The successor representation in human reinforcement learning. *Nat. Hum. Behav.* **2017 19** **1**, 680–692 (2017).
14. Wang, J. X. *et al.* Prefrontal cortex as a meta-reinforcement learning system. *Nat. Neurosci.* **2018 21** **6**, 860–868 (2018).
15. Bellman, R. E. & Zadeh, L. A. Decision-Making in a Fuzzy Environment. <https://doi.org/10.1287/mnsc.17.4.B141> **17**, B-141-B-164 (1970).
16. Dezfouli, A. *et al.* Disentangled behavioural representations. *Adv. Neural Inf. Process. Syst.* **32**, (2019).
17. Dezfouli, A., Nock, R. & Dayan, P. Adversarial vulnerabilities of human decision-making. *Proc. Natl. Acad. Sci. U. S. A.* **117**, 29221–29228 (2020).
18. Sutton, R. S. & Barto, A. G. *Introduction to reinforcement learning*. vol. 135 (MIT press Cambridge, 1998).
19. Van Hasselt, H., Guez, A. & Silver, D. Deep Reinforcement Learning with Double Q-Learning. *Proc. AAAI Conf. Artif. Intell.* **30**, 2094–2100 (2016).
20. Mnih, V. *et al.* Human-level control through deep reinforcement learning. *Nat.* **2015 518** **7540** **518**, 529–533 (2015).
21. Kim, D., Jeong, J. & Lee, S. W. Prefrontal solution to the bias-variance tradeoff during reinforcement learning. *Cell Rep.* **37**, (2021).
22. Kim, D., Park, G. Y., O'Doherty, J. P. & Lee, S. W. Task complexity interacts with state-space uncertainty in the arbitration between model-based and model-free learning. *Nat. Commun.* **2019 10** **10**, 1–14 (2019).
23. Heo, S., Sung, Y. & Lee, S. W. Effects of subclinical depression on prefrontal–striatal model-based and model-free learning. *PLOS Comput. Biol.* **17**, e1009003 (2021).
24. Kool, W., Cushman, F. A. & Gershman, S. J. When Does Model-Based Control Pay Off? *PLOS Comput. Biol.* **12**, e1005090 (2016).
25. Dolan, R. J. & Dayan, P. Goals and Habits in the Brain. *Neuron* **80**, 312–325 (2013).
26. Dayan, P. & Balleine, B. W. Reward, Motivation, and Reinforcement Learning. *Neuron* **36**, 285–298 (2002).
27. Balleine, B. W. & Dickinson, A. Goal-directed instrumental action: contingency and incentive learning and their cortical substrates. *Neuropharmacology* **37**, 407–419 (1998).
28. Graybiel, A. M. Habits, rituals, and the evaluative brain. *Annu. Rev. Neurosci.* **31**, 359–387 (2008).
29. Valentin, V. V., Dickinson, A. & O'Doherty, J. P. Determining the Neural Substrates of Goal-Directed Learning in the Human Brain. *J. Neurosci.* **27**, 4019–4026 (2007).
30. De Wit, S., Corlett, P. R., Aitken, M. R., Dickinson, A. & Fletcher, P. C. Differential Engagement of the Ventromedial Prefrontal Cortex by Goal-Directed and Habitual Behavior toward Food

735 Pictures in Humans. *J. Neurosci.* **29**, 11330–11338 (2009).

736 31. Yin, H. H., Knowlton, B. J. & Balleine, B. W. Lesions of dorsolateral striatum preserve outcome
737 expectancy but disrupt habit formation in instrumental learning. *Eur. J. Neurosci.* **19**, 181–189
738 (2004).

739 32. Yin, H. H., Ostlund, S. B., Knowlton, B. J. & Balleine, B. W. The role of the dorsomedial striatum
740 in instrumental conditioning. *Eur. J. Neurosci.* **22**, 513–523 (2005).

741 33. Wyckmans, F. *et al.* Reduced model-based decision-making in gambling disorder. *Sci. Reports*
742 *2019* **9**, 1–10 (2019).

743 34. Voon, V. *et al.* Disorders of compulsivity: a common bias towards learning habits. *Mol. Psychiatry*
744 *2015* **20**, 345–352 (2014).

745 35. Robinson, T. E. & Berridge, K. C. The incentive sensitization theory of addiction: some current
746 issues. *Philos. Trans. R. Soc. B Biol. Sci.* **363**, 3137–3146 (2008).

747 36. Lee, R. S. C., Hoppenbrouwers, S. & Franken, I. A Systematic Meta-Review of Impulsivity and
748 Compulsivity in Addictive Behaviors. *Neuropsychol. Rev.* **29**, 14–26 (2019).

749 37. Abramovitch, A., Abramowitz, J. S. & Mittelman, A. The neuropsychology of adult obsessive–
750 compulsive disorder: A meta-analysis. *Clin. Psychol. Rev.* **33**, 1163–1171 (2013).

751 38. Kim, T. *et al.* Neurocomputational model of compulsivity: deviating from an uncertain goal-
752 directed system. *Brain* **147**, 2230–2244 (2024).

753 39. Ruan, Z., Liu, S., Liu, Y. an, Yang, Q. & Peng, Z. Disorders of compulsivity: Deficits in arbitrating
754 learning strategies. *Addict. Biol.* **29**, e13433 (2024).

755 40. Yoshida, W. & Seymour, B. Decisions about Decisions. *Neuron* **81**, 468–470 (2014).

756 41. O’Doherty, J. P., Lee, S. W. & McNamee, D. The structure of reinforcement-learning mechanisms
757 in the human brain. *Curr. Opin. Behav. Sci.* **1**, 94–100 (2015).

758 42. Soni, A., Srivastava, S., Kording, K. & Khosla, M. Conclusions about Neural Network to Brain
759 Alignment are Profoundly Impacted by the Similarity Measure. *bioRxiv* 2024.08.07.607035 (2024)
760 doi:10.1101/2024.08.07.607035.

761 43. Bengio, Y., Louradour, J., Collobert, R. & Weston, J. Curriculum learning. *ACM Int. Conf.*
762 *Proceeding Ser.* **382**, (2009).

763 44. Matiisen, T., Oliver, A., Cohen, T. & Schulman, J. Teacher-Student Curriculum Learning. *IEEE*
764 *Trans. Neural Networks Learn. Syst.* **31**, 3732–3740 (2017).


765 45. Lee, J. H., Heo, S. Y., & Lee, S. W. Controlling human causal inference through in silico task
766 design. *Cell Reports*, 43(2) (2024).

767 46. Luce, R. D. INDIVIDUAL CHOICE BEHAVIOR * Theoretical Analysis.


768 47. Hinton, G., Srivastava, N. & Swersky, K. Neural Networks for Machine Learning Lecture 6a
769 Overview of mini---batch gradient descent.

770 48. Cohen, J. Statistical Power Analysis for the Behavioral Sciences. *Stat. Power Anal. Behav. Sci.*
771 (2013) doi:10.4324/9780203771587.


Extended Data

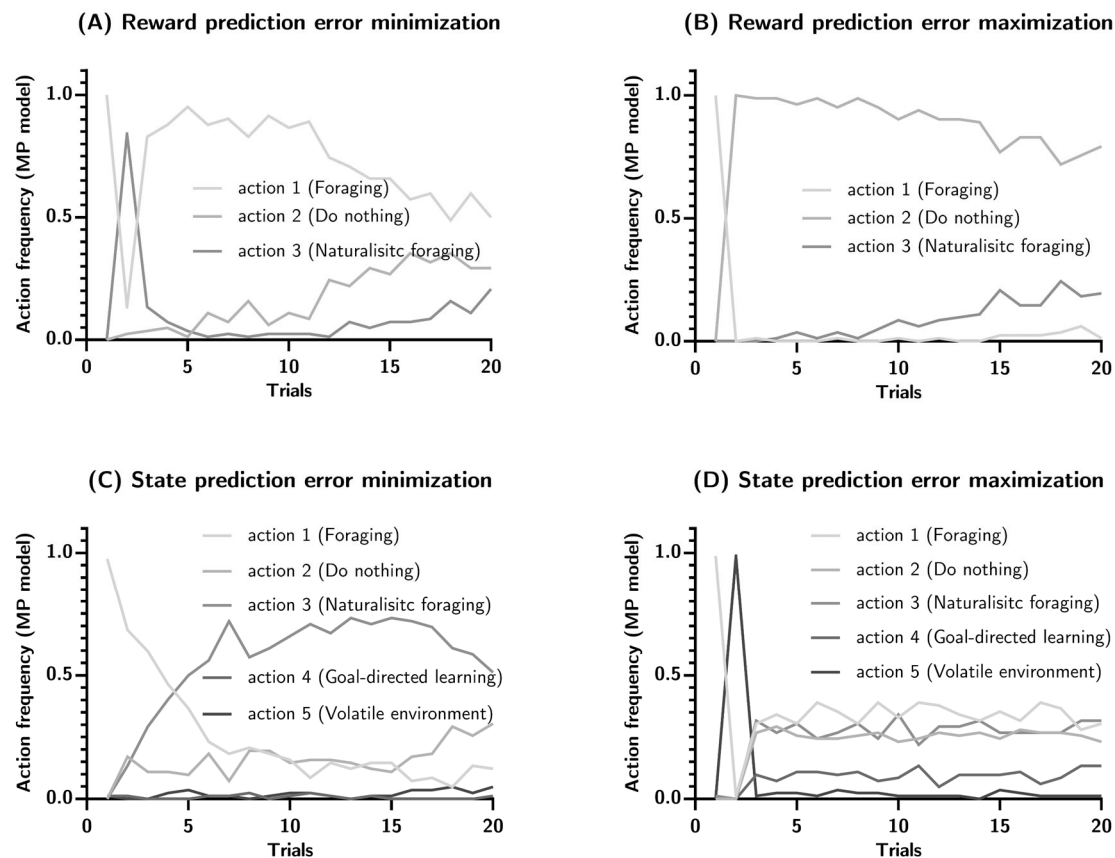

Extended Data Figure 1, Related to Figure 3. The action sequences of subject-specific meta-prediction (MP) models after training. The y-axis represented the frequency of actions across 82 MP models. In trial 1, all MP models were set to the 'Foraging' (action 1) action. **(A)** MP models minimizing reward prediction error selected the 'Naturalistic foraging' action at trial 2, followed by consistent 'Foraging' (action 1) actions, reducing reward discrepancies between optimal and suboptimal choices. **(B)** MP models maximizing reward prediction error favored the 'Do nothing' (action 2) actions from trial 2 onward, maintaining a steady reward discrepancy between optimal and suboptimal choices. **(C)** MP models minimizing state prediction error maintained the initial low volatility (state transition probability = [0.9, 0.1]) by ignoring the 'Volatile environment' (action 5) action and frequently chose the 'Goal-directed learning' (action 4) action to reinforce goal-directed behaviors in the HP model. **(D)** MP models maximizing state prediction error quickly shifted environmental volatility to a high stochastic level (state transition probability = [0.5, 0.5]) and kept it by using the 'Volatile environment' (action 5) action only in trial 2. Moreover, MP models used the 'Goal-directed learning' (action 4) action less than other actions, promoting a shift in HP models from goal-directed to more habitual behaviors.

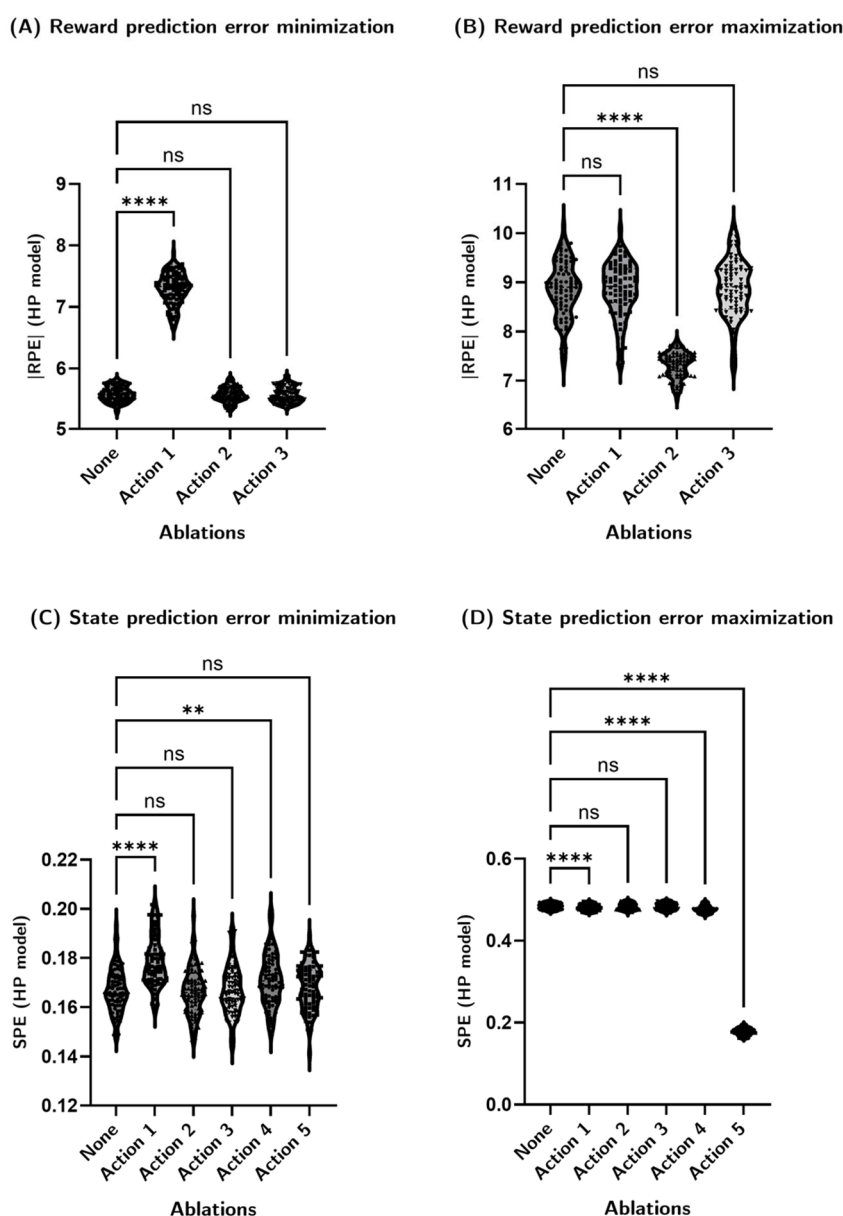


Extended Data Figure 2, Related to Figure 3. The effect of action ablation in meta-prediction (MP) models on HP model behavior. On the x-axis, 'None' represented fully intact MP models, while 'Action #' denoted MP models with specific action removed. (A) MP models minimizing reward prediction error showed significantly impaired performance in reward error control when the key action 'Foraging' (action 1) was ablated. (B) Removing the 'Do nothing' action (action 2) in the MP models maximizing reward prediction error led to significant performance reduction. (C) The action ablation effects on the MP models minimizing state prediction error were non-significant. (D) For state prediction error maximization, ablation of the 'Volatile environment' action (action 5) significantly impaired performance. Ablating 'Goal-directed learning' (action 4) also reduced state prediction error control.

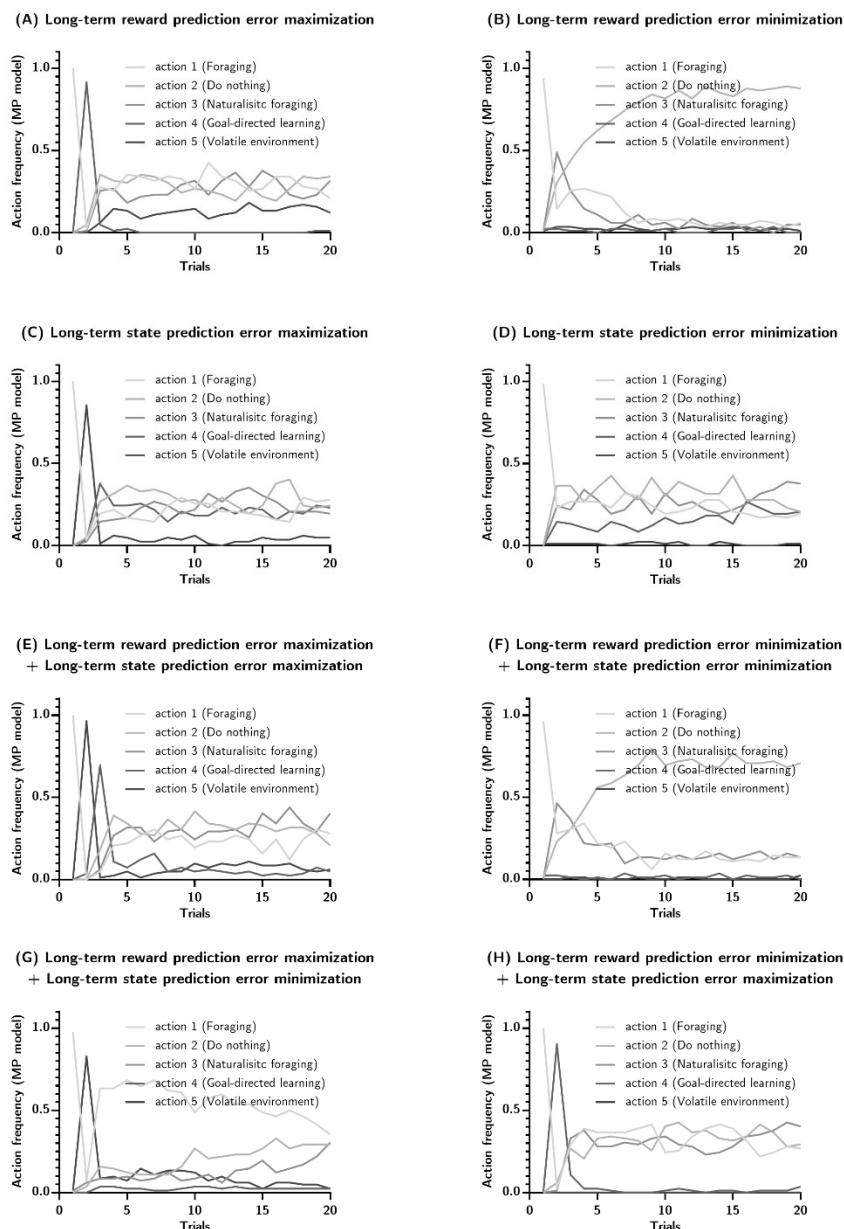


798

799 **Extended Data Figure 3, Related to Figure 5.** The action sequences of subject-specific meta-prediction (MP)
800 models after training for controlling long-term prediction errors. The y-axis represented the frequency of actions
801 across 82 MP models. In trial 1, all MP models were set to the ‘Foraging’ (action 1) action. **(A–D)** MP models
802 controlling a single type of prediction error displayed distinct action profiles: **(A)** a ‘Goal-directed learning’ (action
803 4) peak at trial 2; **(B)** a ‘Do nothing’ (action 2) plateau; **(C)** a ‘Volatile environment’ (action 5) peak at trial 2; and
804 **(D)** ‘Volatile environment’ (action 5) avoidance. **(E–H)** MP models controlling both prediction errors exhibited
805 combined action profiles from relevant single-error MP models. **(E)** showed a mix of **(A)** ‘Goal-directed learning’
806 (action 4) peak at trial 2 and **(C)** ‘Volatile environment’ (action 5) peak at trial 3. **(F)** combined **(B)** ‘Do nothing’
807 (action 2) plateau and **(D)** ‘Volatile environment’ (action 5) avoidance. **(G)** combined **(A)** ‘Goal-directed learning’
808 (action 4) peak at trial 2 and **(D)** ‘Volatile environment’ (action 5) avoidance. **(H)** combined **(B)** ‘Do nothing’
809 (action 2) plateau with **(C)** ‘Volatile environment’ (action 5) peak at trial 2.


810

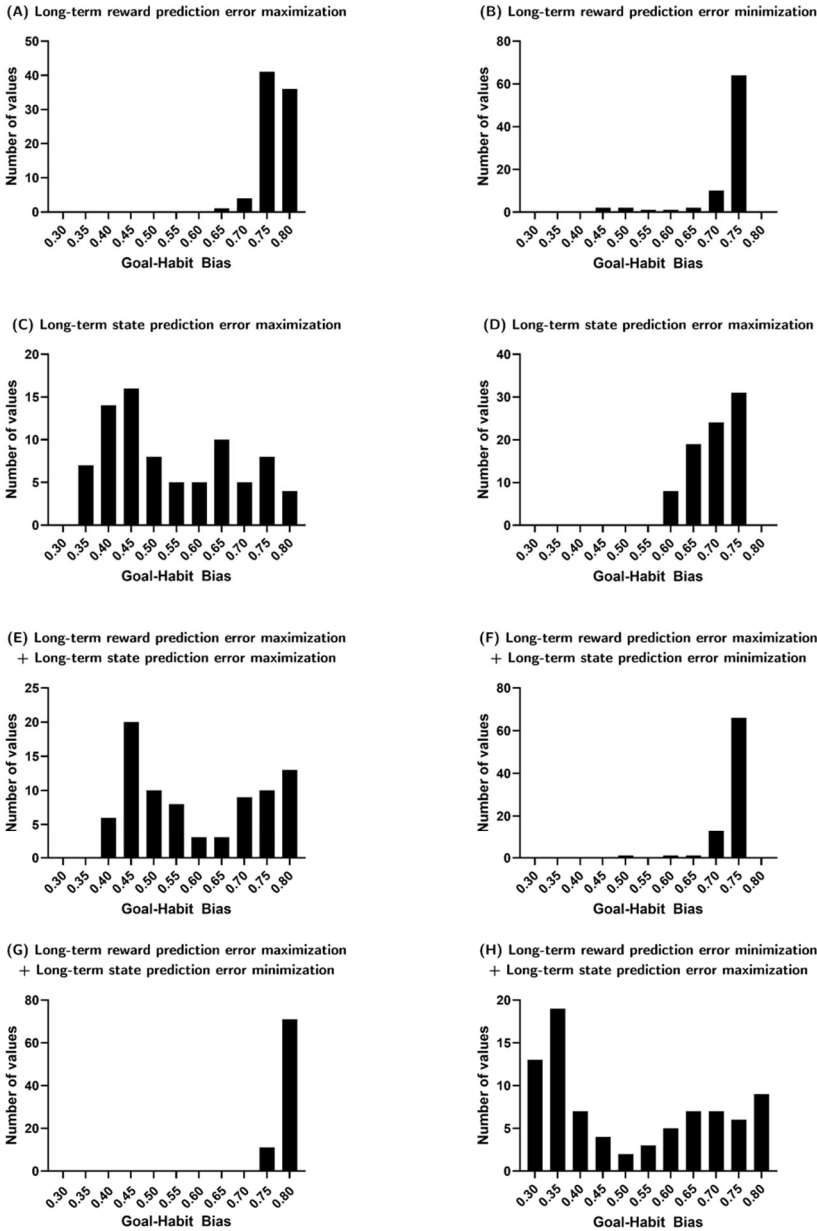


Extended Data Figure 4, Related to Figure 5. The goal-habit bias of HP models with trained subject-specific MP models for long-term prediction error controls. (A-D) The goal-habit bias of HP models with MP models controlling only one type of prediction errors. Only the MP Models maximizing long-term state prediction error (C) stretched the goal-habit bias of HP models toward to habitual direction. (E-H) The goal-habit bias of HP models with MP models controlling both type of prediction errors. The MP models which maximizes the long-term prediction errors (E,H) showed the goal-habit bias separation among HP models.

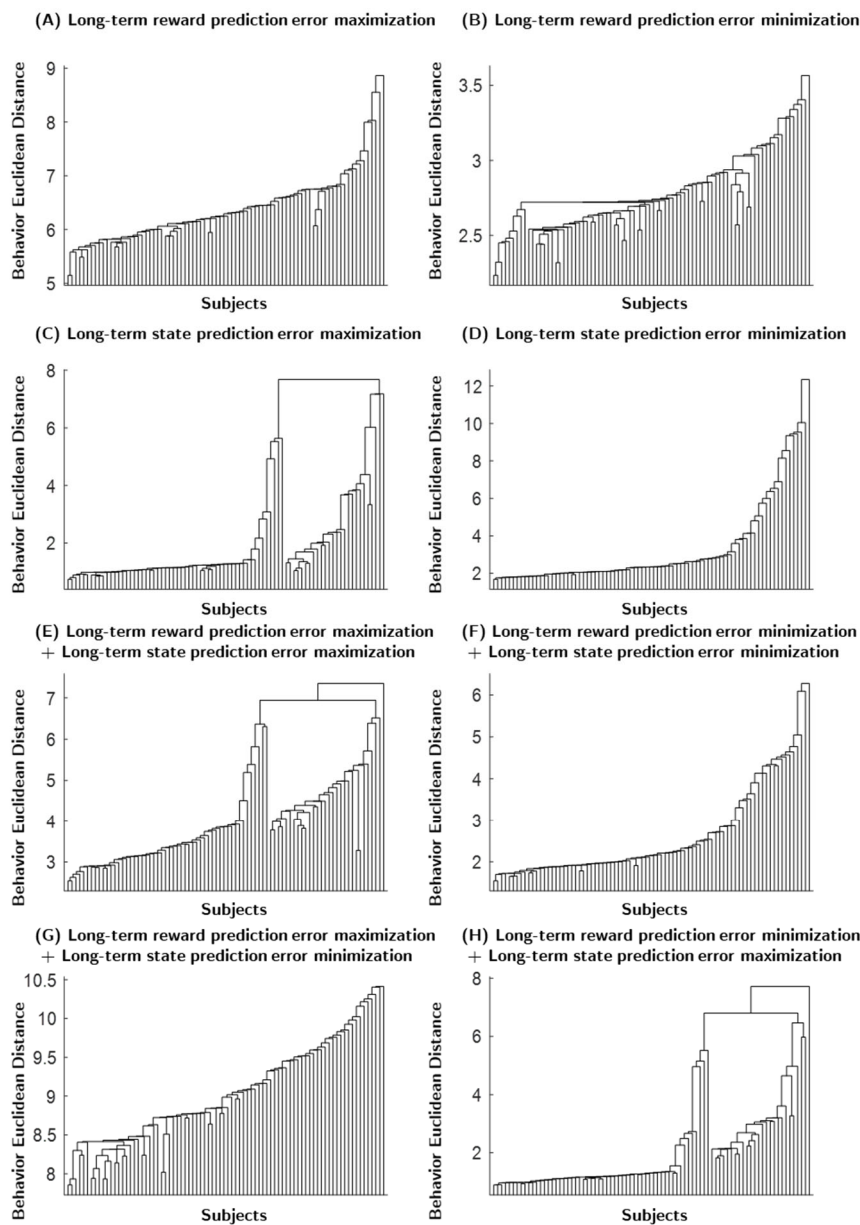

Extended Data Figure 5, Related to Figure 5. The distance between the HP models' simulated behavior from the whole trained subject-specific MP models set. The x-axis was automatically sorted for visualization. The HP model behaviors under MP models with the long-term state prediction error maximizations (C,E,H) showed two clusters in the dendrogram, while other MP models (A,B,D,F,G) did not show the separations.

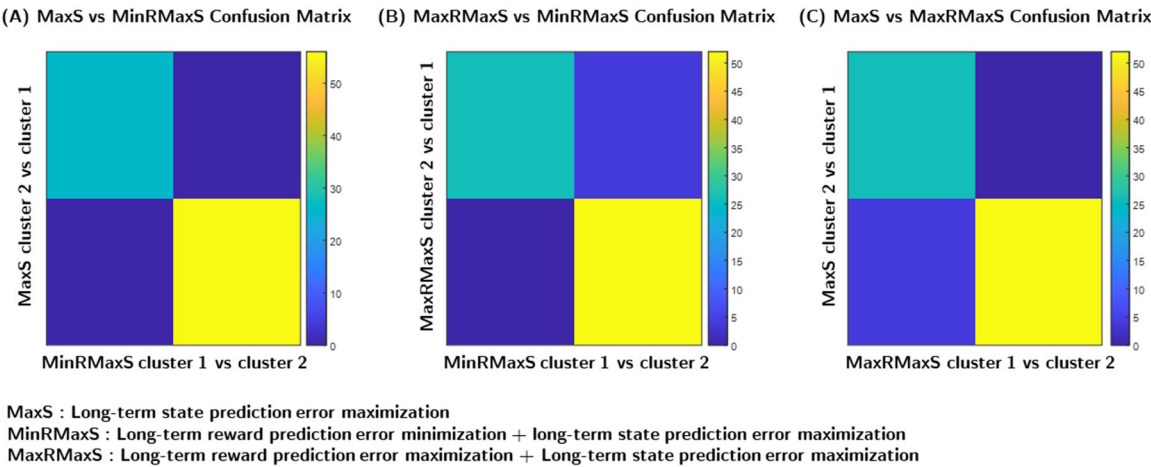

Extended Data Figure 6, Related to Figure 5. The confusion matrices between HP model clusterings under 3 MP models (The long-term state prediction error maximization only; MaxS, The long-term reward prediction error maximization + the long-term state prediction minimization; MaxRMaxS, The long-term reward prediction error minimization + the long-term state prediction minimization; MinRMaxS). The HP model clusters were replicated in independent classifications with each MP model.

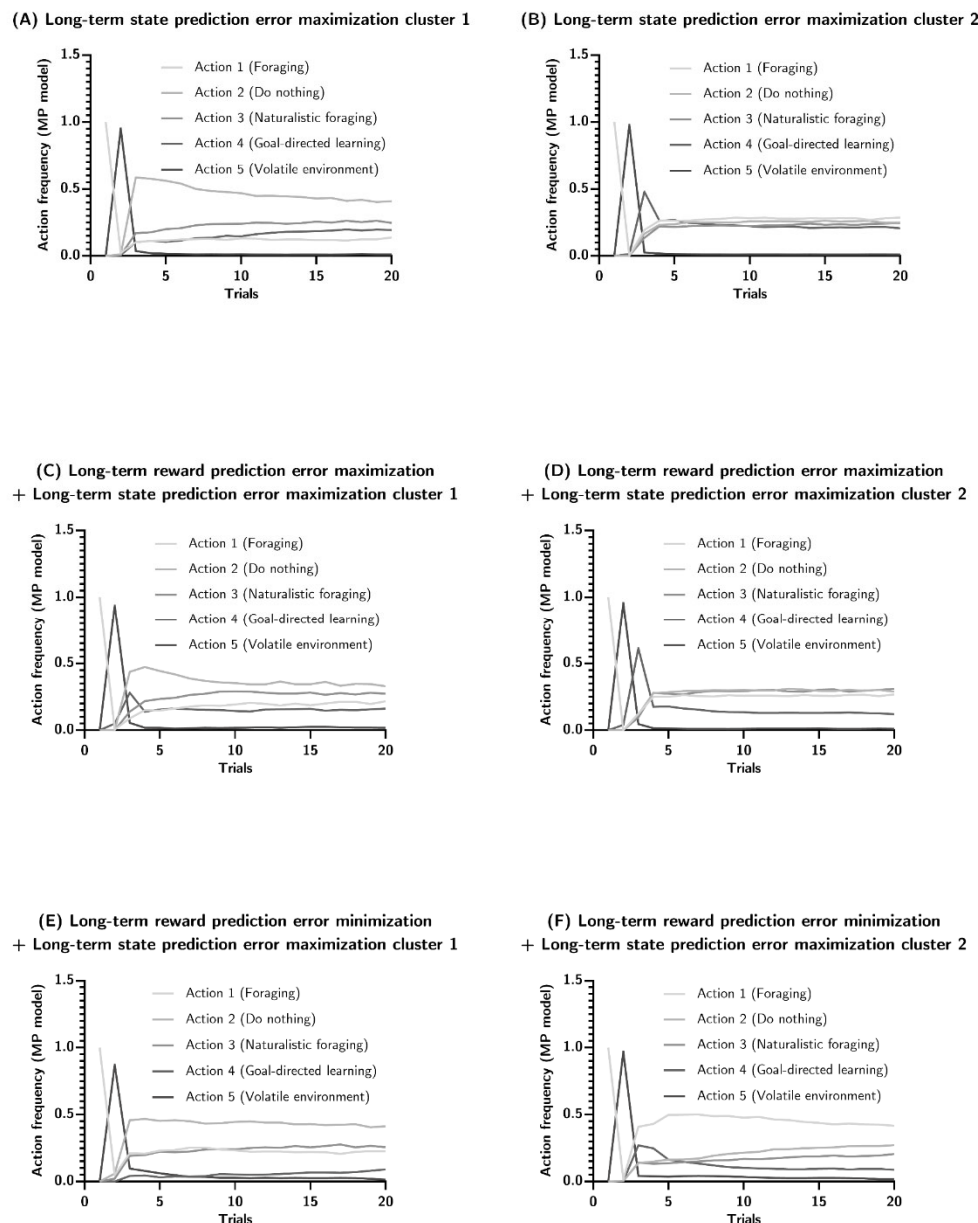

832

833 **Extended Data Figure 7, Related to Figure 5.** Optimized action sequences of subject-specific meta-prediction
 834 (MP) models controlling long-term prediction errors within each cluster. The y-axis represented action frequency
 835 across 82 MP models. All MP models were set to 'Foraging' (action 1) in trial 1. (A, B) MP models maximizing
 836 only the long-term state prediction error. Both clusters exhibited a prominent 'Volatile environment' (action 5)
 837 peak in trial 2. From trial 3 onward, clusters diverged: cluster 1 MP models (A) favored 'Do nothing' (action 1)
 838 in remaining trials, while cluster 2 MP models (B) selected 'Goal-directed learning' (action 4) in trial 3, then made
 839 random actions, excluding 'Volatile environment' (action 5), after trial 3. (C, D) MP models maximizing both
 840 long-term reward prediction error and long-term state prediction error. The MP models followed a mixed policy,
 841 combining the behavior of long-term state prediction error MP models in the same cluster with the policy of long-
 842 term reward prediction error maximization MP models (see Extended Data Fig. 3A). (E, F) MP models
 843 minimizing long-term reward prediction error and maximizing long-term state prediction error. These MP models
 844 followed a mixed policy, combining the behavior of long-term state prediction error MP models in the same cluster
 845 with that of long-term reward prediction error minimization MP models (see Extended Data Fig. 3B).

846

Supplementary Data

Table S1. Parameter values of human prediction models in Meta-prediction training , Related to Figure 1C.

parameter subject	1	2	3	4	5	6
1	0.614434	0.077846	0.485981	6.358767	0.02833	0.199619
2	0.768861	0.303617	0.121948	9.841435	0.163633	0.079116
3	0.789506	0.348951	0.104459	7.674034	0.151593	0.069762
4	0.409728	0.106105	0.115738	3.459498	0.109123	0.100876
5	0.526636	0.289645	0.100623	9.439895	0.092528	0.141934
6	0.606038	0.342951	0.111231	9.076079	0.190424	0.131374
7	0.760805	0.257565	0.111405	8.585745	0.24738	0.049113
8	0.547765	0.097489	0.10841	3.83039	0.267223	0.023925
9	0.655238	0.348549	0.141602	8.84792	0.119685	0.097181
10	0.662204	0.035764	0.113472	9.770955	0.232971	0.176474
11	0.44467	0.047784	0.106051	0.493613	0.131951	0.198862
12	0.310721	0.051232	0.329584	0.133219	0.070455	0.191334
13	0.571157	0.322415	0.12557	9.499509	0.042897	0.07735
14	0.43934	0.095588	0.116781	0.145777	0.113934	0.187598
15	0.31271	0.010084	0.128219	6.354347	0.075998	0.199572
16	0.310466	0.015333	0.100762	0.100675	0.034124	0.178554
17	0.388709	0.023578	0.110374	0.874238	0.092507	0.090436
18	0.431981	0.01841	9.12556	5.438772	0.073431	0.198329
19	0.407993	0.048459	0.117829	0.176122	0.200654	0.086718
20	0.779709	0.341282	0.130899	9.993625	0.133518	0.086143
21	0.752672	0.346166	0.132993	7.2859	0.107888	0.01332
22	0.322062	0.024744	0.106951	0.124803	0.165586	0.068983
23	0.446239	0.246659	0.779179	6.856203	0.121264	0.091161
24	0.371982	0.228268	2.823635	5.559278	0.065565	0.199967
25	0.381629	0.111274	0.109168	6.159796	0.049914	0.128051
26	0.788474	0.340892	0.110013	8.002945	0.052318	0.100677
27	0.321857	0.017022	0.111729	1.000458	0.178763	0.014052
28	0.300924	0.029971	9.905311	6.714189	0.061418	0.034508

parameter subject	1	2	3	4	5	6
29	0.324384	0.09861	9.9952	0.115685	0.126445	0.199985
30	0.537777	0.296909	0.11631	2.262599	0.088132	0.195528
31	0.592012	0.338338	0.110825	9.999963	0.148137	0.177133
32	0.301583	0.342705	9.146814	9.922909	0.010052	0.010093
33	0.755449	0.314772	0.170361	8.759698	0.081446	0.033905
34	0.776697	0.346732	9.997266	9.987646	0.059832	0.199926
35	0.605991	0.186202	0.432683	6.133691	0.010068	0.010406
36	0.302178	0.01087	0.134902	1.309548	0.045499	0.199933
37	0.531646	0.095563	0.111375	3.536236	0.092553	0.021334
38	0.637308	0.342439	0.109019	7.637068	0.221664	0.092096
39	0.59083	0.014004	0.111107	6.30222	0.172549	0.141236
40	0.362292	0.056831	1.003234	0.194567	0.065983	0.01008
41	0.300063	0.010425	0.109499	0.735191	0.249828	0.166104
42	0.39453	0.027757	0.290048	1.50953	0.057533	0.077469
43	0.415871	0.06227	0.13131	2.027751	0.046044	0.146878
44	0.786126	0.095856	0.109239	9.074241	0.15545	0.117417
45	0.303426	0.331936	0.513855	7.642088	0.046049	0.19903
46	0.712641	0.344217	4.342648	9.410404	0.135017	0.199966
47	0.302296	0.115472	9.737553	2.706059	0.09124	0.15917
48	0.403089	0.032476	0.110356	4.048887	0.021734	0.083046
49	0.788937	0.082713	0.166061	8.764681	0.094145	0.199098
50	0.635781	0.337506	0.113893	9.691597	0.184215	0.095825
51	0.627248	0.31874	0.112056	8.719899	0.115659	0.12472
52	0.690221	0.130822	0.111413	9.197222	0.137439	0.057715
53	0.761633	0.033442	0.273668	9.813905	0.032257	0.010046
54	0.315846	0.057795	0.112027	0.112444	0.370857	0.103709
55	0.329614	0.264606	0.183554	2.144173	0.062925	0.17437
56	0.485611	0.013314	0.15194	0.101912	0.30808	0.090112

parameter subject	1	2	3	4	5	6
57	0.35893	0.329849	0.104179	9.616879	0.10953	0.112101
58	0.414693	0.33331	0.165218	9.657266	0.085795	0.199955
59	0.50646	0.118649	0.116518	2.924663	0.082591	0.179123
60	0.705979	0.33874	0.103961	9.991226	0.095651	0.126693
61	0.475085	0.108457	0.116342	3.730337	0.134566	0.113445
62	0.430969	0.347205	0.113076	9.993661	0.301218	0.13597
63	0.364989	0.335778	0.106356	9.525257	0.325967	0.160961
64	0.313824	0.066376	0.108005	0.746548	0.337433	0.152106
65	0.305608	0.023424	0.110639	0.100247	0.16997	0.095547
66	0.478126	0.015675	0.113917	0.104709	0.370248	0.012558
67	0.312882	0.265409	0.110839	6.826111	0.355819	0.022437
68	0.408621	0.34813	0.116268	9.545918	0.132775	0.102069
69	0.737792	0.349941	0.110716	9.088162	0.329604	0.109003
70	0.300125	0.328244	0.107688	9.979268	0.400769	0.077915
71	0.324178	0.020972	0.116942	1.075751	0.118785	0.032027
72	0.328015	0.012474	0.107297	2.428303	0.150773	0.199184
73	0.689799	0.144685	1.92092	2.926623	0.168029	0.159962
74	0.310902	0.056944	0.376634	3.406745	0.032164	0.067326
75	0.303094	0.058424	0.119711	0.482937	0.252542	0.010001
76	0.318385	0.0385	0.107431	9.728752	0.162256	0.110868
77	0.734543	0.349841	0.115792	9.647542	0.227691	0.140819
78	0.331594	0.014504	0.1101	0.10008	0.338421	0.191684
79	0.596621	0.32534	9.936829	9.266734	0.220292	0.010664
80	0.777138	0.349217	9.979405	8.676161	0.031022	0.197258
81	0.54892	0.308085	0.119453	7.895054	0.117192	0.197752
82	0.369014	0.013708	0.110438	3.257821	0.063261	0.141257

851

852 Parameter: 1- the threshold for defining zero state prediction error (SPE tolerance), 2- learning rate for the estimate
853 of absolute reward prediction error, 3- the amplitude of a transition rate function (habitual to goal-directed), 4- the
854 amplitude of a transition rate function (goal-directed to habitual), 5- inverse softmax temperature, and 6- learning
855 rate of the goal-directed and the habitual learning systems, respectively.

856 **Table S2. Estimated parameter values of prefrontal arbitration model, Related to Figure 4.**

Reward prediction error control tasks						
subject \ parameter	1	2	3	4	5	6
1	0.475129	0.244932	3.66343	3.02382	0.081958	0.047232
2	0.368079	0.487818	2.376709	9.898783	0.118322	0.310977
3	0.488006	0.488482	3.354468	9.92199	0.055769	0.049636
4	0.665453	0.197037	3.832987	3.856635	0.050004	0.010007
5	0.536118	0.414714	1.046106	1.191814	0.058217	0.49608
6	0.451306	0.412087	1.005015	2.671201	0.082689	0.421449
7	0.50993	0.306304	3.497932	5.415076	0.063202	0.010761
8	0.482246	0.114717	2.36597	4.052568	0.248365	0.123599
9	0.359004	0.492258	3.494057	9.872424	0.075655	0.499487
10	0.370926	0.486767	3	9.999978	0.1	0.479178
11	0.503838	0.201378	2.649779	3.627712	0.066899	0.161286
12	0.437984	0.155733	2.104488	2.651422	0.229046	0.088943
13	0.51512	0.241276	3.741184	1.757229	0.112595	0.116186
14	0.390985	0.498614	3.684519	9.610778	0.050109	0.499951
15	0.49285	0.052648	1.673708	1.00693	0.175449	0.495999
16	0.340496	0.194724	4.031402	1.98596	0.100013	0.320243
17	0.57028	0.252891	3.776668	3.968012	0.061544	0.018286
18	0.384995	0.499965	4.677387	9.982321	0.104433	0.235305
19	0.442284	0.323197	2.957537	3.083252	0.062703	0.422468
20	0.485335	0.092766	1.912168	5.453637	0.314769	0.010305
21	0.451767	0.499699	4.221357	9.999563	0.05025	0.367851
22	0.47545	0.489992	3.40096	9.935951	0.050412	0.456673
23	0.321378	0.489111	3.660831	9.824635	0.323079	0.17502
24	0.388085	0.430312	3.369189	9.662924	0.131554	0.180766
25	0.430411	0.083497	2.296856	3.430749	0.190055	0.292059
26	0.582313	0.161638	2.901955	2.576973	0.217325	0.052623

State prediction error control tasks

subject \ parameter	1	2	3	4	5	6
1	0.366403	0.899558	4.227148	9.858211	0.105907	0.101737
2	0.491226	0.197798	3.1235	2.959441	0.100011	0.100006
3	0.511405	0.210789	3.089085	2.880197	0.1	0.100105
4	0.264288	0.894963	3.366421	7.665539	0.109545	0.100476
5	0.448075	0.877808	4.455444	9.682624	0.100003	0.100014
6	0.312218	0.870475	4.200886	9.850393	0.106495	0.1009
7	0.542662	0.210569	3.332858	2.724288	0.100051	0.100005
8	0.440397	0.893482	3.866649	9.994524	0.1	0.101707
9	0.392674	0.890089	6.462891	9.938265	0.100013	0.100588
10	0.586275	0.216551	3.138944	2.998257	0.100031	0.100074
11	0.598884	0.203268	3.158897	3.048291	0.100001	0.100018
12	0.626025	0.89911	4.766795	9.93205	0.101802	0.215735
13	0.499932	0.238437	3.001558	2.997257	0.1	0.1
14	0.244288	0.899826	3.203043	9.983915	0.101463	0.6295
15	0.547448	0.22875	3.357933	1.919244	0.100001	0.100177
16	0.287579	0.753099	4.259656	9.912507	0.100303	0.100581
17	0.384664	0.832239	3.775143	9.952997	0.100023	0.100004
18	0.213488	0.892058	6.227573	9.999685	0.105125	0.100049
19	0.769316	0.487718	7.616646	6.59841	0.100007	0.100012
20	0.859277	0.437525	4.38729	7.214847	0.147334	0.100008
21	0.606601	0.635436	7.318267	4.538007	0.100004	0.100045
22	0.842506	0.567995	4.425778	3.372492	0.100479	0.218753
23	0.897395	0.161823	4.412243	7.593415	0.193518	0.1

Parameter: 1- the threshold for defining zero state prediction error (SPE tolerance), 2- learning rate for the estimate of absolute reward prediction error, 3- the amplitude of a transition rate function (habitual to goal-directed), 4- the amplitude of a transition rate function (goal-directed to habitual), 5- inverse softmax temperature, and 6- learning rate of the goal-directed and the habitual learning systems, respectively.

865 **Table S3. Neural signatures of the habitual and goal-directed system signals, Related to Figure 4.**

x	y	z	Peak in region	Hemi	p (FWE)	Z-score
Reward prediction error (RPE) in RPE control task						
-12	42	34	rACC	L	0.000	4.19 ⁺⁺
-14	8	-12	Ventral Striatum (NAc)	L	0.074	3.88 ⁺⁺
12	8	-14	Ventral Striatum (NAc)	R	0.035	3.84 ⁺⁺
Reward prediction error (RPE) in SPE control task						
-26	-4	20	Dorsal striatum (putamen)	L	0.027	4.24 ⁺⁺
State prediction error (RPE) in SPE control task						
34	22	0	Insula	R	0.000	6.09*
4	32	50	dmPFC	R	0.000	5.73*
-26	-70	-10	Fusiform	L	0.000	5.61*
42	8	30	IPFC	R	0.000	5.50*
-38	6	34	IPFC	L	0.000	5.36*
-10	-74	-30	Cerebellum	L	0.002	5.31*
-26	-84	18	Cuneus	L	0.000	5.29*
48	16	46	dIPFC	R	0.002	5.11*
14	-66	36	Precuneus	R	0.002	5.10*
30	-56	44	IPS	R	0.000	5.07*
-30	22	0	Insula	L	0.003	5.04*
10	4	6	Ventral Striatum (NAc)	R	0.000	4.99*
-28	-58	44	IPS	L	0.007	4.82*
26	-70	-6	Fusiform	R	0.004	4.81*

866

867 - rACC: rostral anterior cingulate cortex, NAc: nuclear accumbens, PCC: posterior cingulate cortex, dmPFC:
868 dorsomedial prefrontal cortex, IPFC: lateral prefrontal cortex, dIPFC: dorsolateral prefrontal cortex, IPS:
869 Intraparietal sulcus

870 - All the areas (marked with either “++”, or “*”) survived after the whole-brain correction for multiple
871 comparison at the cluster level (corresponding to “+”; height threshold $t=3.53$, extent>100 voxels), except for the
872 value signals.

873 - p (FWE): corresponds to peak-level if the z-score indicates *, and corresponds to cluster-level if the zscore
874 indicates ++/+.

875 *: thresholded $p<0.05$ FWE corrected at the peak-level, minimum 5 voxels extent.

876 ++: survives whole-brain correction for multiple comparison at the cluster level (height threshold $t=3.53$,
877 extent>200 voxels).